

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

PCT / SE 2004 / 000144

REC'D 24 FEB 2004

WIPO

PCT

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm
Applicant (s) SE

(21) Patentansökningsnummer 0303462-6
Patent application number

(86) Ingivningsdatum 2003-12-22
Date of filing

Stockholm, 2004-02-17

För Patent- och registreringsverket
For the Patent- and Registration Office



Marita Öun

Avgift
Fee

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

**PATENT- OCH
REGISTRERINGSVERKET
SWEDEN**

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

Arrangements and method for handling macro diversity in UTRAN

Field of the invention

5 The present invention relates to arrangements and method in a third generation mobile telecommunication system and evolved variants thereof. In particular, the invention relates to arrangements and method for handling timing of the combining procedure in conjunction with certain aspects of macro diversity in a UMTS Radio Access Network
10 (UTRAN) transport network.

Background of the invention

15 Third generation mobile communication systems (3G, Universal Mobile Telecommunications System (UMTS)) shall offer high quality voice and data services for mobile users. The systems shall also provide high capacity and universal coverage. In some situations that may however be difficult to fulfil, due to unreliable radio channels. One promising technique to combat link reliability problems over the radio interface is macro diversity techniques. Macro diversity should however also be seen
20 as an inherent consequence of using CDMA as the multiple access technique in a cellular network. CDMA is an interference limited technology. That is, it is the interference in a cell that sets the upper limit for the cell's capacity. To keep the interference as low as possible it is essential that the base station controls the output power of the radio transmitters of the mobile terminals in the cell, i.e. fast and efficient power control is essential. As a mobile terminal moves towards the periphery of a cell it has to increase the power of its radio transmission in order for the base station to be able to receive the transmitted signal. Likewise, the base station has to increase the power of its radio
25 transmission towards the mobile terminal. This power increase has a deteriorating effect on the capacity of both the mobile terminal's own cell and the neighbouring cell(s) which the mobile terminal is close to. Macro
30

diversity is used to mitigate this effect. When the mobile terminal communicates via more than one base station, the quality of the communication can be maintained with a lower radio transmission power than when only a single base station is used. Thus, macro diversity is both a feature raising the quality of unreliable radio channels and a necessity that is required in order to overcome an inherent weakness of CDMA based cellular systems.

Figure 1 illustrates a UTRAN. The Radio Network Controller (RNC) is connected to the Core Network that in turn may be connected to another network. The RNC is connected to one or more Node Bs also denoted base stations via a transport network. The transport network may e.g. be IP-based or ATM-based. The Node Bs may be wirelessly connected to one or several User Equipments (UEs) also denoted mobile terminals. A Serving-RNC (S-RNC) is a RNC that has a Radio Resource Connection (RRC) connection with the UE. A Drift-RNC (D-RNC) is a RNC that may be connected to a UE, but where another RNC, i.e. the S-RNC, handles the RRC connection with the UE.

Macro diversity enables a mobile station to communicate with a fixed network by more than one radio link, i.e. a mobile can send/receive information towards/from more than one radio port (or base station also denoted Node B). The radio ports (RPs) are spatially separated at distance from a short distance, e.g. between different floors in a building, (pico-cells) up to about some kilometres (micro- and macro-cells). As the propagation conditions between the mobile terminal and the different RPs, are different at the same moment in time, the resulting quality of the combination of the received signals is often better than the quality of each individual signal. Thus, macro diversity can improve radio link quality. When a mobile terminal is connected to more than one base station simultaneously, the UE is said to be in soft handover.

Macro diversity is applicable only to dedicated channels (DCH). Currently all the macro diversity functionality resides in the RNC provided that the

corresponding functionality for softer handover in Node B is not considered. In the downlink, the splitting is performed in the RNC, which ensures that a copy of each downlink DCH FP frame is sent through each leg in the active set of the concerned DCH. Both DCH FP data frames and
5 DCH FP control frames are subject to the splitting function.

In the uplink, the RNC performs the combining, which is more complicated than, the splitting. Only DCH FP data frames are subject to the combining procedure. DCH FP control frames are not combined,
10 since each uplink DCH FP control frame includes control data that is specific for an individual Node B. For the uplink, the RNC has a time window in which all legs are expected to deliver their contribution to the combining (i.e a DCH FP frame with a certain Connection Frame Number (CFN)). At the expiration of the time window, all the DCH FP frames with
15 the correct CFN that were received within the time window are passed to the combining function.

The actual combining is a selection of the best piece of data out of the candidates that were received through the different legs. For non-voice
20 DCHs, the unit of selection is a transport block (TB). To determine which of the candidates to select for a certain transport block, the CRCI for the concerned TB is checked in each of the delivered frames. If one and only one of them indicates that the TB was correctly received at the Node B (i.e. that the CRC check was successful for the concerned TB when it was
25 received by the Node B), this TB is selected. Otherwise, if more than one of the CRCIs indicate successful CRC check, the combining function selects the one of these TBs that belongs to the frame with the greatest Quality Estimate (QE) parameter. Likewise, if all of the CRCIs indicate unsuccessful CRC check, the combining function selects the TB from the
30 frame with the greatest QE parameter. If in the two latter cases, the greatest QE parameter value is found in two or more of the frames (i.e. if these QE parameters are equal too), the selection of TB is implementation dependent. **Figure 2** illustrates the combining procedure for non-voice DCHs.

For voice DCHs, the combining works slightly differently. The Adaptive Multi Rate (AMR) speech codec produces three subflows, wherein each are transported in a respective DCH. These three DCHs are so-called coordinated DCHs. The coordinated DCHs are included in the same DCH FP frame and there is only one TB for each subflow in a frame. During the combining, the combining function does not select separate TBs from different candidate frames to create a new combined frame as described above in the context of non-voice DCHs. Instead it selects one entire frame based on the CRCI for the TB associated with subflow 1, which is the most significant subflow. The CRCI of the other subflows are insignificant, since these subflows are not CRC protected over the radio interface. Again, if the CRCIs indicated unsuccessful CRC check or because all of the concerned CRCIs indicate unsuccessful CRC check, the frame with the greatest QE parameter is selected. **Figure 3** illustrates the combining procedure for voice DCHs.

Hence macro diversity in current UTRANs is realised through macro diversity functionality, also denoted as Diversity Handover (DHO) functionality in the RNCs. The current standards allow DHO functionality in both the Serving RNC (S-RNC) and the D-RNC, but the possibility to locate the DHO functionality in the D-RNC is commonly not used.

Thus, a problem in the existing macro diversity solutions is that the split downlink flows and the uncombined uplink flows of user data are transported all the way between the RNC and the Node B. That results in that costly transmission resources are consumed in the UTRAN transport network, which also results in significant costs for the operators.

Summary of the invention

One way to solve the above stated problem is to distribute the macro diversity functionality to

A problem is then to.....

The object of the present invention is to solve the above stated problem.

5 The problem is solved by the present by distributing the macro diversity functionality from the RNC to another node in the UTRAN closer to the mobile terminal. The node is referred to as a DHO enabled node and may be a node in the UTRAN transport network such as a router or a Node B or even a future type of node, e.g. a specialised DHO node. Thus the splitting and combining of the traffics flows may be performed in a router
10 in the transport network or in a Node B. The macro diversity functionality may also be distributed to more than one such other node such that several splitting and combining nodes are interconnected in a way that a hierarchical tree of macro diversity data flows is formed.

15 However, when the macro diversity functionality, also referred to as DHO functionality, is distributed to other nodes than the RNCs, possibly in a hierarchical fashion, a problem arises in conjunction with the timing of the uplink combining procedure.

20 Thus, the object of the present invention to achieve a method for solving the problem of the timing of the uplink combining procedure.

25 The most important advantage achieved by the present invention is transmission savings in the UTRAN transport network, which translate into significant cost savings for the operator. The transmission savings are realised through optimised location the DHO functionality. Thereby the redundant data transport is eliminated in the parts of the path, where data pertaining to different macro diversity legs of the same DCH would otherwise be transported in parallel along the same route.

30 Another advantage of the present invention is that it facilitates that RNCs be located in more central locations of the network (i.e. with less

geographical distribution). The main purpose of the current common geographical distribution of RNCs is to limit the transmission costs for the parallel macro diversity legs. When this parallel data transport is eliminated, it becomes more beneficial for an operator to centralise the RNCs, e.g. by co-locating them with MSCs or MGWs. Co-locating several nodes on the same site results in simplified operation and maintenance, which also means reduced costs for the operator.

Brief description of the drawings

Fig. 1 is a schematic illustration of a UMTS Terrestrial Radio Access Network.

Fig. 2 illustrates schematically the combining procedure for non-voice DCHs.

Fig. 3 illustrates schematically the combining procedure for voice DCHs.

Fig. 4a and 4b illustrates schematically potential transmission savings in a network according to the present invention.

Fig. 5 is a schematic reference figure for the timing algorithm 1 according to the present invention.

Fig. 6 is a schematic reference figure for algorithm 1 when relative times are used according to an embodiment of the present invention.

Fig. 7 and fig. 8 illustrates schematically the combining timing scheme according to one embodiment of the present invention.

Figure 9 illustrates the basic operation of a combining timing algorithm in the single-leg mode.

Figure 10 illustrates the basic operation of a combining timing algorithm using a variation of the single-leg mode.

Detailed description

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as

limited to the embodiments set forth herein; rather these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, like numbers refer to like elements.

5

In the further description of the present invention coordinated DCHs are not specifically treated. In the aspects that are significant to the present invention a set of coordinated DCHs is treated in the same way as a single separate DCH. The DCHs of a set of coordinated DCHs use a common transport bearer and in an IP UTRAN the frames (of a set of coordinated DCHs) with the same CFN are included in the same UDP packet. The special combining procedure for coordinated DCHs has been described above. Thus, omitting coordinated DCHs serves to simplify the description of the present invention and makes the text more readable. To generalize the description of the present invention so as to comprise coordinated DCHs would be obvious for a person skilled in the art, although it would significantly complicate the text.

10

15

20

The present invention may be implemented in a UTRAN having an Internet Protocol (IP)-based transport network as illustrated in **figure 1**. The IP based transport network may be controlled by an IP of version 4, 6 or future versions. The present invention may also be implemented in a UTRAN having an Asynchronous Transfer Mode (ATM) based transport network.

25

30

In order to reduce the required transmission resources, the present invention proposes to distribute the macro diversity functionality from the RNC to another node in the UTRAN closer to the mobile terminal. The node is referred to as a DHO enabled node and may be a node in the UTRAN transport network such as a router or a Node B or even a future type of node, e.g. a specialised DHO node. Thus the splitting and combining of the traffics flows may be performed in a router in the transport network or in a Node B. The macro diversity functionality may

also be distributed to more than one such other node such that several splitting and combining nodes are interconnected in a way that a hierarchical tree of macro diversity data flows is formed.

5 However, when the macro diversity functionality, also referred to as DHO functionality, is distributed to other nodes than the RNCs, possibly in a hierarchical fashion, a problem arises in conjunction with the timing of the uplink combining procedure.

10 In the further description a DHO enabled node that is actually executing the DHO functionality is denoted a DHO node. The DHO node that is responsible for a radio link towards the mobile terminal may more specifically be denoted radio active DHO node. Likewise, the DHO node that is not responsible for a radio link towards the mobile terminal e.g. a
15 router in the UTRAN transport network or a Node B without a radio link to the mobile terminal may more specifically be denoted non-radio active DHO node.

In current UTRANs the RNC has a receive window for uplink DCH FP frames with the same Connection Frame Number (CFN) from different
20 macro diversity legs of the same DCH. At the end of the receive window the received frames are combined. The receive window may be adjusted, i.e. moved (and theoretically even extended or shrunk) based on the actual arrival times of the uplink frames, in order to adapt to the transport delay through the UTRAN transport network. The RNC may
25 also simply set the time of arrival window in a non-adaptive fashion based on the maximum delay that a frame (under normal circumstances) experiences when transported through the UTRAN transport network. The UTRAN transport network is then dimensioned such that the transport delay for a DCH FP frame under normal circumstances very
30 seldom exceeds a maximum allowed value.

When the DHO functionality is distributed to other UTRAN nodes, the situation is different. The distributed DHO nodes introduce longer data paths and, in case of hierarchical DHO nodes, additional combining delays. In order to efficiently utilise the distributed, hierarchical DHO functionality the additional combining delay should be minimised. In addition, in the general case the hierarchical DHO node scheme enables numerous potential combinations of DHO nodes, resulting in many different possible transport delays between a leaf Node B and a DHO node. Thus, a simple "always-assume-maximum-delay" strategy is not acceptable. To be able to economise with the combining delay and to be able to deal with unpredictable delays, an adaptive uplink receive window for each DCH has to be used in the distributed DHO nodes. Furthermore, if a DHO node lacks a suitable internal time reference for the receive window, this is yet a motivation for making the receive window adaptive.

The object of the uplink combining timing algorithm according to the present invention is to minimise the additional delay caused by waiting for lost or abnormally delayed frames, while ensuring that normally delayed frames are seldom lost (i.e. excluded from the combining procedure). In essence, the object of the timing algorithm is to achieve a reasonable trade-off between combining delay and frame loss. Therefore the timing algorithm according to the present invention is arranged to adapt the end of the receive window to the greatest reasonable delay for a certain delay class (if delay classes are used). The timing algorithm uses the actual arrival times of the uplink frames as input data together with parameters that are either preconfigured, explicitly signalled from the RNC or derived from data signalled from the RNC, e.g. the Transmission Time Interval (TTI) and DCH characteristics.

Explicitly signalled timing algorithm parameters are conveyed from the RNC to the DHO node in conjunction with the establishment or modification of the macro diversity tree. The protocol to use to convey the parameters from the RNC to the DHO node may be NBAP, RNSAP or some other type of protocol for conveying parameters from the RNC to a router acting as a DHO node.

The timing algorithm may be executed in either of two modes: single-leg mode or all-leg mode. In the single-leg mode a DHO node executes one independent timing algorithm instance for each uplink macro diversity leg (for each DCH) that the DHO node combines (except the one that arrives across the radio interface of the DHO node itself). For each CFN for which uplink frames are expected (i.e. for each TTI) the timing algorithm calculates a receive window for each macro diversity leg. (A Node B transmits data once every TTI. The size of the TTI may vary for different DCHs, whereas the CFN is always incremented at a constant rate (with a period of 10 ms) that is higher than that of the smallest possible TTI. Thus, depending on the size of the TTI the difference between the CFNs of two consecutive DCH FP data frames may be different for different DCHs. For simplicity this circumstance is disregarded during the further description of the present invention.) A receive window for a single macro diversity is henceforth denoted "leg receive window". For each frame combining (i.e. for each CFN), the timing algorithm instance that indicates the latest combining time (i.e. the latest leg receive window end) governs the latest allowed time of combining.

A leg receive window is "closed" when its end is reached or when the expected frame arrives, whichever happens first. A DHO node keeps waiting for frames to be combined as long as at least one of the leg receive windows associated with the DCH macro diversity legs to be combined is "open". Assume, for instance, that a DHO node combines two macro diversity legs in addition to the macro diversity leg across its own radio interface for a certain DCH. The leg receive window for the first leg has the latest endpoint, but its frame happens to arrive before the frame of the second leg. The leg receive window of the first leg is then closed and the DHO node will wait no longer than until the end of the leg receive window of the second leg (or until the frame of the second leg arrives) before it combines the received frames and sends off the result. This means that even if the frame of the second leg does not arrive, the DHO node may stop waiting before the end of the leg receive window of the first leg (which had the latest endpoint), which was initially seen as the latest allowed time of combining. This example of the basic operation of a timing algorithm in the single-leg mode is illustrated in **figure 9**.

A variation of the single-leg mode, which could be seen as something in between the above described single-leg mode and the all-leg mode, is to let a leg receive window remain "open" until its endpoint, even if its expected frame has arrived (unless the frame was the last of the frames to be combined in which case the frames are combined immediately upon the arrival of the last frame). With this principle the above example with two macro diversity legs in addition to the macro diversity leg across the radio interface of the DHO node becomes different. Since the leg receive window of the first leg is not closed when its frame arrives, the DHO node may wait for the frame of the second leg as long as until the end of the leg receive window of the first leg (which had the latest endpoint) before combining the received frames (unless the frame of the second leg arrives earlier than the end of the leg receive window of the first leg). Thus, in this variation of the single-leg mode the end of the leg receive window of the first leg (i.e. the latest of the endpoints of the leg receive windows of the macro diversity legs to be combined) remains the latest allowed time of combining irrespective of when the different frames arrive. This example of the basic operation of a timing algorithm using this variation of the single-leg mode is illustrated in **figure 10**.

In the all-leg mode a DHO node executes a single timing algorithm instance for all uplink macro diversity legs (for each DCH) that the DHO node combines (excluding the one that arrives across the radio interface of the DHO node itself). The timing algorithm calculates a receive window for each CFN, but no separate leg receive windows.

In both modes, if the DHO node has received an uplink frame from each macro diversity leg to be combined before the latest allowed time of combining, it should not waste time waiting until the end of a receive window. Instead it immediately combines the received frames and sends
5 off the result. The opposite strategy, i.e. always waiting until the latest allowed time of combining (according to the timing algorithm), would also work, although less efficiently, and may have the advantage that it is simpler to implement.

Furthermore, if the DHO node is a radio active DHO node that has two
10 (or more) softer handover legs for the concerned DCH, the DHO node should always wait for the completion of the softer handover combining before performing the combining of the other macro diversity leg(s), even if the softer handover combining is not completed until after the last allowed time of combining according to the timing algorithm. In essence
15 this means that the actual latest allowed time of combining is set by the latest of the time indicated by the timing algorithm and the time of completion of the softer handover combining.

Frames that arrive too late for the combining procedure may be either discarded or forwarded uncombined. Discarding is the simplest principle,
20 but if forwarding is used, the frame may eventually be included in a combining procedure in the RNC. If the forwarding option is used, DHO nodes should always be prepared to recalculate the timing algorithm calculations in accordance with a later arriving unexpected frame.

25 In a radio active Node B acting as a DHO node the expected time of arrival of uplink data across the radio interface forms a natural reference that marks the start of the receive window or leg receive window for a certain CFN. For such radio active DHO nodes the RNC may provide an initial estimate for the end of the receive window or the end of each leg
30 receive window, based on the delay information in a topology database or possibly other information sources. In a non-radio active DHO node e.g. a non-radio active Node B or a router there is no such reference. Instead a non-radio active DHO node may use the end of the previous receive window or leg receive window (or the time of combining for the previous CFN) as the start of the

current receive window or leg receive window. A consequence of the lack of time reference is that the combining non-radio active node is not able to easily define a time of arrival window for the frames to be combined. The trigger point may be the first of the candidate frames that arrive. The non-radio active node is then required to wait for the remaining candidate frame(s) to arrive from the other leg(s). When the combining is performed in the RNC as in the prior art, the RNC waits until the end of the TTI, but the non-radio active node does not have any such reference timing. Thus the timing algorithm may differ between radio active DHO nodes and non-radio active DHO nodes.

The timing algorithm must also be able to handle the case when frames do not arrive at all (e.g. because of frame loss or discontinuous transmission, DTX). There are two solutions to the problem that a DHO node cannot determine in advance whether a frame will not arrive at all or is just being unexpectedly or abnormally delayed. The first solution is that the DHO node after combining the available frames for CFN = n assumes that any yet outstanding frames will not arrive and performs the timing algorithm calculations accordingly. In such case the DHO node must be prepared to recalculate the timing algorithm calculations in case an outstanding frame subsequently arrives. Thus, the DHO node must keep the timing algorithm parameters associated with CFN = n until the start of the next receive window or leg receive window or until a frame with a CFN > n arrives. The second solution is that the DHO node waits a sufficiently long time, e.g. TTI/2 or until, or almost until, the expected start of the next receive window or leg receive window if such a time reference is available before it performs the timing algorithm calculations associated with CFN = n.

An RNC (i.e. an SRNC or a combining DRNC) may use the same timing principle (and algorithm if any) as in today's UTRANs without distributed DHO functionality, but it may also use any timing algorithm described in the embodiments of the present invention. If an RNC uses a timing algorithm that requires a time reference, it can estimate a reasonable time reference based on the synchronization between the RNC and the

Node Bs which is acquired e.g. by using a Node Synchronisation procedure.

5 Hence, one way to overcome the above stated problem is according to the present invention to let the DHO node define an adaptive latest accepted time of arrival (LAToA) for a set of frames to be combined, i.e. the expected frames with a certain Connection Frame Number (CFN). The object is to adapt the LAToA to the maximum transport delay that a frame is allowed to experience on its path from the originating Node B to
10 the DHO node, assuming that this transport delay very seldom exceeds the maximum allowed transport delay as stipulated by standard requirements.

15 In general, the DHO node uses one of the timing algorithms to estimate the LAToA for the next frame (in the single-leg mode) or set of frames (in the all-leg mode) to be combined, i.e. a set of frames with a certain CFN, based on the times of arrival of the previous set of frames, i.e. the frames with the previous CFN. The estimates are adjusted for each new CFN.

20 A number of uplink combining timing algorithms according to embodiments of the present invention are described in the following. Some of them are designed specifically for radio active DHO nodes, while others can be used by both radio active and non-radio active DHO nodes.

Timing Algorithms for Radio Active DHO Nodes

25 The uplink combining timing algorithms in this section are designed for radio active DHO nodes.

Timing Algorithm 1

Timing algorithm 1 calculates the LAToA for a next frame or (in the single-leg mode) or set of frames (in the all-leg mode) to be combined and is first elaborated for the single-leg mode. Then the differences between the all-leg mode and the single-leg mode are described.

5 The timing algorithm adapts to the actual arrival times of the uplink frames in order to set a reasonable end of the leg receive window. It allows a safety margin for each frame in addition to the latest expected time of arrival.

10 When a frame arrives later than expected, this is interpreted as an indication of that the end of the leg receive window should be moved later in time for the next frame. However, since there are occasional abnormally delayed frames and since the path delay may vary in time, the algorithm slowly moves the end of the leg receive window earlier in time when frames arrive before the latest expected time of arrival.

15 If a single abnormally delayed frame causes the end of the leg receive window to be moved far, it may take a significant number of CFNs before the slow advancing mechanism has brought the end of the leg receive window back to reasonable values. In the meantime, the DHO node will wait too long for lost or abnormally delayed frames. The consequence of
20 waiting too long is that the uplink frames that the DHO node sends may eventually arrive too late at the RNC and consequently be lost. To reduce this risk the desired behaviour of the algorithm is to be somewhat conservative in moving the end of the leg receive window further away in large steps and to quickly bring back the end of the leg receive window to
25 reasonable values, until the late arrival time is confirmed by several frames.

30 This behaviour is achieved by making the leg receive window end advancing mechanism adaptive in itself. A sudden large increase in the delay causes the advancing mechanism to speed up. During periods without large delay increases the advancing mechanism gradually slows down to a minimum value.

Figure 5 illustrates the timing algorithm 1. **Figure 5** illustrates most of the parameters that are used in the timing algorithm for a general uplink frame with CFN = n. The LAToA and M parameters have to have their initial values defined, i.e. LAToA_{init} and M_{init}.

5 A value to be used to set LAToA_{init} may be signalled from the RNC e.g. together with the other DHO related instructions. What can actually be signalled is a relative time limit i.e. the initial Latest Acceptable Relative Time of Arrival, LARToA_{init}. Thus, LAToA_{init} = ref_{init} + LARToA_{init}. The RNC may base the LARToA_{init} value on delay data in the route tree retrieved
10 from a topology database or possibly other information sources.

In accordance with an embodiment of the invention, the LAToA_{init} is not signalled from the RNC, but it is set to a preconfigured default value. This default value may be different or one and the same for different QoS classes. E.g. one for each delay class if delay classes are used. It may
15 also be derived from the DCH characteristics (e.g. those signalled from the RNC when the DCH is established). In any case the default LAToA_{init} value should be conservatively set such that the initial leg receive window is only a rather small fraction (e.g. 10%) of the maximum allowed total transport delay in the UTRAN for the concerned delay class if applicable.

20 In the general case an M parameter is defined which is the sum of two parts: a fixed part (M_{fix}), which is the same for all CFNs, and a dynamic part (M_{dynamic}), which varies for each CFN. There are several alternative ways of calculating M_{dynamic}. If possible, the value of M_{init} is calculated by inserting the initial values of the input parameters in the general formula
25 for M. If this is not possible, because some of the parameters in the general M formula have no defined initial values, then M_{init} = M_{fix}. M_{fix} may be signalled from the RNC (in the Combining timing info IE) or derived from the DCH characteristics. It may also be a preconfigured value, possibly per delay class. M_{fix} should typically have a value between
30 0 and around 10% of the maximum allowed UTRAN transport network delay.



The value of the MLRWS parameter may be signalled from the RNC e.g. together with other DHO related instructions. If it is not signalled from the RNC it may be either preconfigured or derived from the DCH characteristics (e.g. QoS class).

- 5 In addition to the parameters illustrated in **figure 5**, some parameters are needed for the leg receive window end advancing mechanism:

δ_n The leg receive window end advancing step for CFN = n. The purpose of the δ , is to advance the leg receive window end relative the time reference, as long as the received frames do not require the opposite. The object is to counteract influence from frames arriving later than they should according to their QoS class.

10

δ_{min} The minimum leg receive window end advancing step.

$\delta_{min1/2}$ Half of the minimum leg receive window end advancing step.

f A parameter that is used in the calculation of δ_{n+1} , when the uplink frame arrived too late for CFN = n.

15

The initial value of δ should be set to δ_{min} , i.e. $\delta_{init} = \delta_{min}$. The f parameter should have a value between 0 and 1, and may be pre-configured. A preferred value is $f = 0.25$.

A summary of the parameters of the timing algorithm is shown below:

20 ref_n The time reference (e.g. the expected time of arrival of uplink data across the radio interface) for CFN = n. $ref_{n+1} = ref_n + TTI$.

ref_{init} The time reference for the first uplink frame to be combined in the concerned macro diversity leg.

ToA_n Time of Arrival of the frame with CFN = n.

25 $LAToA_n$ Latest Acceptable time of Arrival for the frame with CFN = n. This is the end of the leg receive window. Frames with CFN $\leq n$ arriving after $LAToA_n$ are not combined.

$LAToA_{init}$ The initial value of LAToA. This parameter value may be preconfigured (possibly per delay class) or derived from the DCH characteristics. It may also be signalled from the RNC in the form of $LARToA_{init}$ with $LAToA_{init} = ref_{init} + LARToA_{init}$.

30

LEToA_n Latest Expected Time of Arrival for the frame with CFN = n.

LEToA_n = LAToA_n - M_n.

5 MLRWS Minimum Leg Receive Window Size. This parameter indicates the minimum size of a leg receive window. It may be preconfigured, derived from DCH specific data (e.g. QoS class) or signalled from the RNC. MLRWS ≥ 0.

M_n The safety margin for the frame with CFN = n. The general formula for calculation of M_n is $M_n = M_{fix} + M_{dynamic-n}$.

10 M_{fix} The fixed part in the general formula for calculation of M_n. M_{fix} may be preconfigured, derived from DCH specific data or signalled from the RNC. M_{fix} typically has a value (possibly per delay class) between 0 and around 10% of the maximum allowed UTRAN transport network delay.

15 M_{dynamic-n} The dynamic part in the general formula for calculation of M_n.

α A parameter used in the calculation of M_{dynamic-n}. α has a fixed configured value $0 \leq \alpha \ll 1$.

M_{init} The initial value of M. If M_{dynamic-init} is defined, $M_{init} = M_{fix} + M_{dynamic-init}$. Otherwise $M_{init} = M_{fix}$.

20 Δ_n The difference between the actual time of arrival and the latest acceptable time of arrival for the frame with CFN = n. $\Delta_n = ToA_n - LAToA_n$.

δ_n The leg receive window end advancing step for CFN = n.

δ_{min} The minimum leg receive window end advancing step.

δ_{min1/2} Half of the minimum leg receive window end advancing step.

25 δ_{init} The initial value of δ. δ_{init} = δ_{min}.

f A parameter that is used in the calculation of δ_{n+1}, when the uplink frame arrived too late for CFN = n. This parameter has a fixed configured value $0 \leq f \leq 1$. A preferred value is $f = 1/4$.

30 TTI Transmission Time Interval. The received frames arrives at an interval of one TTI. The parameter is a part of the basic DCH characteristics.

For each uplink frame the parameters LA_{ToA_n} , M_n and δ_n have to be calculated. For the first frame to be combined the initial parameter values are used. For any subsequent frame the algorithm considers four different cases:

5 Case 1: $ToA_n \leq LA_{ToA_n} - M_n$

Case 2: $LA_{ToA_n} - M_n < ToA_n \leq LA_{ToA_n}$

Case 3: $ToA_n > LA_{ToA_n}$

Case 4: The frame does not arrive at all, i.e. ToA_n is undefined.

The calculations performed for the different cases are described below.

10 Case 1, $ToA_n \leq LA_{ToA_n} - M_n$:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2}$$

$$LA_{ToA_{n+1}} = \text{MAX}(LA_{ToA_n} + TTI - \delta_{n+1}, \text{ref}_{n+1} + \text{MLRWS})$$

There are different ways of calculating M_{n+1} :

M_{n+1} calculation method I (the preferred method):

15
$$\begin{aligned} M_{n+1} &= M_{fix} + \alpha(LA_{ToA_{n+1}} - \text{ref}_{n+1}) = \\ &= M_{fix} + \alpha(LA_{ToA_n} + TTI - \delta_{n+1} - \text{ref}_{n+1}) \end{aligned}$$

The method I, adjusts M_{n+1} to the size of the leg receive window $n+1$.

M_{n+1} calculation method II:

$$M_{n+1} = M_{fix} + \alpha(LA_{ToA_n} - \text{ref}_n)$$

20 The method II adjusts M_{n+1} to the sizw of the leg receive window n . That results in a poorer adjustment but the method II is less complex than method I.

M_{n+1} calculation method III:

$$M_{n+1} = M_{fix} + \alpha(ToA_n - \text{ref}_n)$$

The method III uses another principal than the methods I and II. It adjusts M_{n+1} to the difference between the time of arrival for frame n and the time reference of frame n .

M_{n+1} calculation method IV:

$$5 \quad M_{n+1} = M_{fix} \text{ (i.e. } \alpha = 0 \text{)}$$

Case 2, $LAToA_n - M_n < ToA_n \leq LAToA_n$:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2}$$

There are different ways of calculating M_{n+1} :

M_{n+1} calculation method I (the preferred but also the most complex):

$$\begin{aligned}
 10 \quad M_{n+1} &= M_{fix} + \alpha(LAToA_{n+1} - ref_{n+1}) = \{\text{see below for } LAToA_{n+1}\} = \\
 &= M_{fix} + \alpha(\text{MAX}(ToA_n + TTI + M_{n+1} - \delta_{n+1}, ref_{n+1} + MLRWS) - ref_{n+1}) \Rightarrow \{ref_{n+1} \\
 &- TTI = ref_n\} \Rightarrow M_{n+1} = \\
 &= \text{MAX}\left(\frac{1}{1-\alpha} \times M_{fix} + \frac{\alpha}{1-\alpha} \times (ToA_n - \delta_{n+1} - ref_n), M_{fix} + \alpha \times MLRWS\right) \text{ where} \\
 &\frac{1}{1-\alpha} \times M_{fix} \text{ and } \frac{\alpha}{1-\alpha} \text{ are constants that can be preconfigured or} \\
 15 \quad &\text{calculated once and for all in advance.}
 \end{aligned}$$

M_{n+1} calculation method II, III and IV are the same as in case 1.

The last step is to calculate $LAToA_{n+1}$:

$$LAToA_{n+1} = \text{MAX}(ToA_n + TTI + M_{n+1} - \delta_{n+1}, ref_{n+1} + MLRWS)$$


Case 3, $ToA_n > LAToA_n$:

$$20 \quad \delta_{n+1} = \delta_n / 2 + \delta_{min1/2} + f \times \Delta_n$$

M_{n+1} is calculated in the same way as in case 2.

$$LAToA_{n+1} = \text{MAX}(ToA_n + TTI + M_{n+1} - \delta_{n+1}, ref_{n+1} + MLRWS)$$

Case 4, the frame does not arrive at all:



In this case ToA_n is undefined. Set $ToA_n = ref_n$ and choose to perform the calculations of case 1, case 2 or case 3 according to the normal criteria (which normally would result in that the calculations of case 1 are performed).

- 5 How does the DHO node determine that the frame will not arrive at all? What if the DHO node determines that the frame will not arrive and performs the calculations of case 4 and then the frame arrives after all? There are two solutions to this problem. The first one is that after $LAToA_n$ the DHO node performs the calculations of case 4, but if the absent
- 10 frame subsequently arrives (before ref_{n+1}), the DHO node must be able to recalculate according to the calculations of case 3. Thus, the DHO node must keep the parameters associated with $CFN = n$ until ref_{n+1} occurs. The second solution is that the DHO node waits a sufficiently long time, e.g. until ref_{n+1} (or almost until ref_{n+1}), before it performs the calculations
- 15 associated with $CFN = n$.

The following is a compact way of expressing timing algorithm 1 in the single-leg mode (using M_{n+1} calculation method I in all cases):

IF (frame with $CFN = n$ does not arrive) THEN $ToA_n = ref_n$;

$\Delta_n = ToA_n - LAToA_n$;

- 20 IF $\Delta_n > 0$ THEN $\delta_{n+1} = \delta_n/2 + \delta_{min1}/2 + f \times \Delta_n$ ELSE $\delta_{n+1} = \delta_n/2 + \delta_{min1}/2$;

IF $\Delta_n > -M_n$ THEN

{

$M_{n+1} =$

$= MAX\left(\frac{1}{1-\alpha} \times (M_{fix} + \alpha \times (ToA_n - \delta_{n+1} - ref_n)), M_{fix} + \alpha \times MLRWS\right)$;

- 25 $LAToA_{n+1} = MAX(ToA_n + TTI + M_{n+1} - \delta_{n+1}, ref_{n+1} + MLRWS)$;

}

ELSE

{

$LAToA_{n+1} = MAX(LAToA_n + TTI - \delta_{n+1}, ref_{n+1} + MLRWS)$;

- 30 $M_{n+1} = M_{fix} + \alpha(LAToA_{n+1} - ref_{n+1})$;

};

This timing algorithm can also be expressed in times relative to the time reference ref instead of absolute times. The resulting reference figure is shown in **figure 6**.

- 5 When relative times are used, if the initial Latest Acceptable Relative Time of Arrival (LARToA_{init}) parameter is signalled from the RNC, it may be used as it is as a time reference for the first frame to be combined.

10 The timing algorithm 1 with relative times determines the LARToA_{n+1} accordingly. The rest of timing algorithm 1 with relative times follows below:

Case 1, $RToA_n \leq LARToA_n - M_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1}/2$$

$$LARToA_{n+1} = \text{MAX}(LARToA_n - \delta_{n+1}, \text{MLRWS})$$

There are different ways of calculating M_{n+1} :

- 15 M_{n+1} calculation method I (the preferred method):

$$\begin{aligned} M_{n+1} &= M_{fix} + \alpha \times LARToA_{n+1} = \\ &= M_{fix} + \alpha(LARToA_n - \delta_{n+1}) \end{aligned}$$

M_{n+1} calculation method II:

$$M_{n+1} = M_{fix} + \alpha \times LARToA_n$$

- 20 M_{n+1} calculation method III:

$$M_{n+1} = M_{fix} + \alpha \times RToA_n$$

M_{n+1} calculation method IV:

$$M_{n+1} = M_{fix} \text{ (i.e. } \alpha = 0\text{)}$$

Case 2, $LARToA_n - M_n < RToA_n \leq LARToA_n$:

- 25 $\delta_{n+1} = \delta_n/2 + \delta_{min1}/2$

There are different ways of calculating M_{n+1} :

M_{n+1} calculation method I (the preferred method):

$$M_{n+1} = M_{fix} + \alpha \times LARToA_{n+1} = \{\text{see below for } LARToA_{n+1}\} = \\ = M_{fix} + \alpha \times \text{MAX}(RToA_n + M_{n+1} - \delta_{n+1}, \text{MLRWS}) \Rightarrow$$

$$5 \quad M_{n+1} = \text{MAX}\left(\frac{1}{1-\alpha} \times M_{fix} + \frac{\alpha}{1-\alpha} \times (RToA_n - \delta_{n+1}), M_{fix} + \alpha \times \text{MLRWS}\right) \text{ where}$$

$\frac{1}{1-\alpha} \times M_{fix}$ and $\frac{\alpha}{1-\alpha}$ are constants that can be preconfigured or calculated once and for all in advance.

M_{n+1} calculation method II, III and IV are the same as in case 1.

The last step is to calculate $LARToA_{n+1}$:

$$10 \quad LARToA_{n+1} = \text{MAX}(RToA_n + M_{n+1} - \delta_{n+1}, \text{MLRWS})$$

Case 3, $RToA_n > LARToA_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times \Delta_n$$

M_{n+1} is calculated in the same way as in case 2.

$$LARToA_{n+1} = \text{MAX}(RToA_n + M_{n+1} - \delta_{n+1}, \text{MLRWS})$$

15 Case 4, the frame does not arrive at all:

In this case $RToA_n$ is undefined. Set $RToA_n = 0$ and choose to perform the calculations of case 1, case 2 or case 3 according to the criterias defining each case (which normally would result in that the calculations of case 1 are performed).

20 The following is a compact way of expressing timing algorithm 1 in the single-leg mode when relative times are used (using M_{n+1} calculation method I in all cases):

IF (frame with CFN = n does not arrive) THEN $RToA_n = 0$;

$$\Delta_n = RToA_n - LARToA_n;$$

25 IF $\Delta_n > 0$ THEN $\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times \Delta_n$ ELSE $\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$;

IF $\Delta_n > -M_n$ THEN

{

$$M_{n+1} = \text{MAX}\left(\frac{1}{1-\alpha} \times (M_{\text{fix}} + \alpha \times (R\text{ToA}_n - \delta_{n+1})), M_{\text{fix}} + \alpha \times \text{MLRWS}\right);$$

$$\text{LARToA}_{n+1} = \text{MAX}(R\text{ToA}_n + M_{n+1} - \delta_{n+1}, \text{MLRWS});$$

5

}

ELSE

{

$$\text{LARToA}_{n+1} = \text{MAX}(\text{LARToA}_n - \delta_{n+1}, \text{MLRWS});$$

$$M_{n+1} = M_{\text{fix}} + \alpha \times \text{LARToA}_{n+1};$$

10

};

15

When timing algorithm 1 is used in the all-leg mode there are only few differences from the above description. The ToA and RToA parameters are replaced by the Time of Arrival of Last Frame (ToAoLF) and Relative Time of Arrival of Last Frame (RToAoLF) parameters, which both refer to the arrival time of the last uplink frame with a certain CFN from any of the macro diversity legs to be combined (except the one across the radio link of the DHO node). In addition, the MLRWS parameter is replaced by the Minimum Receive Window Size (MRWS) parameter, which refer to the receive window for all macro diversity legs to be combined. Furthermore,

20

in the all-leg mode the condition for case 4 becomes that none of the uplink frames arrive (including all macro diversity legs to be combined except the one across the DHO node's own radio interface).

25

When (and if) signalling timing algorithm parameters to a DHO node using a timing algorithm in the all-leg mode, the RNC may include the $\text{LARToA}_{\text{init}}$, the MRWS, and the M_{fix} parameters (when sent to a radio active DHO node).



5

Timing Algorithm 2

15

20

25

30

ELEToA_{init}
LAToA_{init}.

The initial value of ELEToA. ELEToA_{init} =

5 ε A parameter used in the calculation of ELEToA. ε should be a preconfigured small value (smaller than δ_{\min}). A suggested value for ε is $\varepsilon = \delta_{\min}/8$.

φ A parameter used in the calculation of ELEToA. φ is a preconfigured parameter that can have any value, preferably such that $0 \leq \varphi \leq M_{\text{fix}}$.

10 Almost the same cases are considered as in timing algorithm 1, but the conditions for case 2 and 3 are modified.

Case 1: $\text{ToA}_n \leq \text{LAToA}_n - M_n$

Case 2: $\text{LAToA}_n - M_n < \text{ToA}_n \leq \text{LAToA}_n$ OR $\text{LAToA}_n < \text{ToA}_n \leq \text{ELEToA}_n$

Case 3: $\text{ToA}_n > \text{LAToA}_n$ AND $\text{ToA}_n > \text{ELEToA}_n$

Case 4: The frame does not arrive at all, i.e. ToA_n is undefined.

15 The calculations performed for the different cases are described below.

Case 1. $\text{ToA}_n \leq \text{LAToA}_n - M_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{\min}/2$$

$$\text{LAToA}_{n+1} = \text{MAX}(\text{LAToA}_n + \text{TTI} - \delta_{n+1}, \text{ref}_{n+1} + \text{MLRWS})$$

$$\text{ELEToA}_{n+1} = \text{MAX}(\text{ELEToA}_n - \varepsilon, \text{ToA}_n + \varphi) + \text{TTI}$$

20 There are different ways of calculating M_{n+1} as in the case of timing algorithm 1 :

M_{n+1} calculation method I (the preferred method):

$$\begin{aligned} M_{n+1} &= M_{\text{fix}} + \alpha(\text{LAToA}_{n+1} - \text{ref}_{n+1}) = \\ &= M_{\text{fix}} + \alpha(\text{LAToA}_n + \text{TTI} - \delta_{n+1} - \text{ref}_{n+1}) \end{aligned}$$

25 *M_{n+1} calculation method II:*

$$M_{n+1} = M_{fix} + \alpha(LAToA_n - ref_n)$$

M_{n+1} calculation method III:

$$M_{n+1} = M_{fix} + \alpha(ToA_n - ref_n)$$

M_{n+1} calculation method IV:

5 $M_{n+1} = M_{fix}$ (i.e. $\alpha = 0$)

M_{n+1} calculation method V:

$$M_{n+1} = M_{fix} + \alpha(ELEToA_{n+1} - ref_{n+1})$$

Case 2, $LAToA_n - M_n < ToA_n \leq LAToA_n$ OR $LAToA_n < ToA_n \leq ELEToA_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1}/2$$

10 $ELEToA_{n+1} = \text{MAX}(ELEToA_n - \varepsilon, ToA_n + \varphi) + TTI$

There are different ways of calculating M_{n+1} :

M_{n+1} calculation method I (the preferred method but also the most complex):

15
$$\begin{aligned} M_{n+1} &= M_{fix} + \alpha(LAToA_{n+1} - ref_{n+1}) = \{\text{see below for } LAToA_{n+1}\} = \\ &= M_{fix} + \alpha(\text{MAX}(ToA_n + TTI + M_{n+1} - \delta_{n+1}, ref_{n+1} + MLRWS) - ref_{n+1}) \Rightarrow \{ref_{n+1} \\ &- TTI = ref_n\} \Rightarrow M_{n+1} = \end{aligned}$$

$$= \text{MAX}\left(\frac{1}{1-\alpha} \times M_{fix} + \frac{\alpha}{1-\alpha} \times (ToA_n - \delta_{n+1} - ref_n), M_{fix} + \alpha \times MLRWS\right) \text{ where}$$

$\frac{1}{1-\alpha} \times M_{fix}$ and $\frac{\alpha}{1-\alpha}$ are constants that can be preconfigured or calculated once and for all in advance.

M_{n+1} calculation method II, III, IV and V are the same as in case 1.

20 The last step is to calculate $LAToA_{n+1}$:

$$LAToA_{n+1} = \text{MAX}(ToA_n + TTI + M_{n+1} - \delta_{n+1}, ref_{n+1} + MLRWS)$$

Case 3, $ToA_n > LAToA_n$ AND $ToA_n > ELEToA_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{\min1/2} + f \times (\text{ToA}_n - \text{MAX}(\text{LAToA}_n, \text{ELEToA}_n))$$

$$\text{ELEToA}_{n+1} = \text{ToA}_n + \varphi + \text{TTI}$$

M_{n+1} is calculated in the same way as in case 2.

$$\text{LAToA}_{n+1} = \text{MAX}(\text{ToA}_n + \text{TTI} + M_{n+1} - \delta_{n+1}, \text{ref}_{n+1} + \text{MLRWS})$$

5 Case 4, the frame does not arrive at all:

In this case ToA_n is undefined. Set $\text{ToA}_n = \text{ref}_n$ and choose to perform the calculations of case 1, case 2 or case 3 according to the normal criteria (which normally would result in that the calculations of case 1 are performed).

10 The following is a compact way of expressing timing algorithm 2 in the single-leg mode using M_{n+1} calculation method I in all cases:

IF (frame with CFN = n does not arrive) THEN $\text{ToA}_n = \text{ref}_n$;

IF $\text{ToA}_n > \text{LAToA}_n$ AND $\text{ToA}_n > \text{ELEToA}_n$ THEN

$$\delta_{n+1} = \delta_n/2 + \delta_{\min1/2} + f \times (\text{ToA}_n - \text{MAX}(\text{LAToA}_n, \text{ELEToA}_n))$$

15 ELSE $\delta_{n+1} = \delta_n/2 + \delta_{\min1/2}$;

$$\text{ELEToA}_{n+1} = \text{MAX}(\text{ELEToA}_n - \varepsilon, \text{ToA}_n + \varphi) + \text{TTI};$$

IF $\text{ToA}_n > \text{LAToA}_n - M_n$ THEN

{

$$M_{n+1} =$$

20 $= \text{MAX}\left(\frac{1}{1-\alpha} \times (M_{\text{fix}} + \alpha \times (\text{ToA}_n - \delta_{n+1} - \text{ref}_n)), M_{\text{fix}} + \alpha \times \text{MLRWS}\right);$

$$\text{LAToA}_{n+1} = \text{MAX}(\text{ToA}_n + \text{TTI} + M_{n+1} - \delta_{n+1}, \text{ref}_{n+1} + \text{MLRWS});$$

}

ELSE

{

25 $\text{LAToA}_{n+1} = \text{MAX}(\text{LAToA}_n + \text{TTI} - \delta_{n+1}, \text{ref}_{n+1} + \text{MLRWS});$

$$M_{n+1} = M_{\text{fix}} + \alpha(\text{LAToA}_{n+1} - \text{ref}_{n+1});$$

};

This timing algorithm may also be expressed in times relative to the time reference ref instead of absolute times. The resulting algorithm description follows below (with ELERToA_n denoting the Extended Latest Expected Time of Arrival for the frame with CFN = n and ELERToA_{init} = LARToA_{init}).

5

Case 1, RToA_n ≤ LARToA_n - M_n:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2}$$

$$LARToA_{n+1} = \text{MAX}(LARToA_n - \delta_{n+1}, \text{MLRWS})$$

$$\text{ELERToA}_{n+1} = \text{MAX}(\text{ELERToA}_n - \varepsilon, RToA_n + \varphi)$$

10

There are different ways of calculating M_{n+1}:

M_{n+1} calculation method I (the preferred method):

$$\begin{aligned} M_{n+1} &= M_{fix} + \alpha \times LARToA_{n+1} = \\ &= M_{fix} + \alpha(LARToA_n - \delta_{n+1}) \end{aligned}$$

M_{n+1} calculation method II:

15

$$M_{n+1} = M_{fix} + \alpha \times LARToA_n$$

M_{n+1} calculation method III:

$$M_{n+1} = M_{fix} + \alpha \times RToA_n$$

M_{n+1} calculation method IV:

$$M_{n+1} = M_{fix} \text{ (i.e. } \alpha = 0\text{)}$$

20

M_{n+1} calculation method V:

$$M_{n+1} = M_{fix} + \alpha \times \text{ELERToA}_{n+1}$$

Case 2, LARToA_n - M_n < RToA_n ≤ LARToA_n OR LARToA_n < RToA_n ≤ ELERToA_n:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2}$$

$$\text{ELERToA}_{n+1} = \text{MAX}(\text{ELERToA}_n - \varepsilon, \text{RToA}_n + \varphi)$$

There are different ways of calculating M_{n+1} :

M_{n+1} calculation method I (the best but also the most complex):

$$\begin{aligned} M_{n+1} &= M_{\text{fix}} + \alpha \times \text{LARToA}_{n+1} = \{\text{see below for LARToA}_{n+1}\} = \\ 5 \quad &= M_{\text{fix}} + \alpha \times \text{MAX}(\text{RToA}_n + M_{n+1} - \delta_{n+1}, \text{MLRWS}) \Rightarrow \\ M_{n+1} &= \text{MAX} \left(\frac{1}{1-\alpha} \times M_{\text{fix}} + \frac{\alpha}{1-\alpha} \times (\text{RToA}_n - \delta_{n+1}), M_{\text{fix}} + \alpha \times \text{MLRWS} \right) \text{ where} \\ \frac{1}{1-\alpha} \times M_{\text{fix}} \text{ and } \frac{\alpha}{1-\alpha} &\text{ are constants that can be preconfigured or} \\ &\text{calculated once and for all in advance.} \end{aligned}$$

M_{n+1} calculation method II, III, IV and V are the same as in case 1.

10 The last step is to calculate LARToA_{n+1} :

$$\text{LARToA}_{n+1} = \text{MAX}(\text{RToA}_n + M_{n+1} - \delta_{n+1}, \text{MLRWS})$$

Case 3, $\text{RToA}_n > \text{LARToA}_n$ AND $\text{RToA}_n > \text{ELERToA}_n$:

$$\delta_{n+1} = \delta_n / 2 + \delta_{\text{min}1} / 2 + f \times (\text{RToA}_n - \text{MAX}(\text{LARToA}_n, \text{ELERToA}_n))$$

$$\text{ELERToA}_{n+1} = \text{RToA}_n + \varphi$$

15 M_{n+1} is calculated in the same way as in case 2.

$$\text{LARToA}_{n+1} = \text{MAX}(\text{RToA}_n + M_{n+1} - \delta_{n+1}, \text{MLRWS})$$

Case 4, the frame does not arrive at all:

20 In this case RToA_n is undefined. Set $\text{RToA}_n = 0$ and choose to perform the calculations of case 1, case 2 or case 3 according to the normal criteria (which normally would result in that the calculations of case 1 are performed).

The following is a compact way of expressing timing algorithm 2 in the single-leg mode when relative times are used (using M_{n+1} calculation method I in all cases):

IF (frame with CFN = n does not arrive) THEN $RToA_n = 0$;
 IF $RToA_n > LARToA_n$ AND $RToA_n > ELERToA_n$ THEN
 $\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times (RToA_n - \text{MAX}(LARToA_n, ELERToA_n))$
 ELSE $\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$;
 5 $ELERToA_{n+1} = \text{MAX}(ELERToA_n - \varepsilon, RToA_n + \phi)$;
 IF $RToA_n > LARToA_n - M_n$ THEN
 {

$$M_{n+1} = \text{MAX}\left(\frac{1}{1-\alpha} \times (M_{fix} + \alpha \times (RToA_n - \delta_{n+1})), M_{fix} + \alpha \times \text{MLRWS}\right)$$
;
 $LARToA_{n+1} = \text{MAX}(RToA_n + M_{n+1} - \delta_{n+1}, \text{MLRWS})$;
 10 }
 ELSE
 {
 $LARToA_{n+1} = \text{MAX}(LARToA_n - \delta_{n+1}, \text{MLRWS})$;
 $M_{n+1} = M_{fix} + \alpha \times LARToA_{n+1}$;
 15 };

When timing algorithm 2 is used in the all-leg mode there are only few differences from the above description. Like for timing algorithm 1 in the all-leg mode the ToA and RToA parameters are replaced by the ToAoLF (Time of Arrival of Last Frame) and RToAoLF (Relative Time of Arrival of Last Frame) parameters, which both refer to the arrival time of the last uplink frame with a certain CFN from any of the macro diversity legs to be combined (except the one across the radio link of the DHO node). In addition, the MLRWS parameter is replaced by the MRWS (Minimum Receive Window Size) parameter, which refer to the receive window for all macro diversity legs to be combined. Furthermore, in the all-leg mode the condition for case 4 becomes that none of the uplink frames arrive (including all macro diversity legs to be combined except the one across the DHO node's own radio interface). The rule for how to handle a $LARToA_{init}$ parameter signalled from the RNC is the same as for timing algorithm 1.

20

25

30

Timing Algorithm 3

Timing algorithm 3 is a simplification of timing algorithm 1 that results from setting $f = 0$ in timing algorithm 1. A result from setting $f=0$, is that the δ parameter becomes a constant, i.e. $\delta = \delta_{\min}$ for all CFNs, since f is a parameter that is used in the calculation of δ when a frame arrives with essential longer delay than previously arrived frames. If $f=0$, the δ can not be changed and it maintains its initial value accordingly. Another consequence is that case 2 and 3 in timing algorithm 1 are merged into one in timing algorithm 3.

The compact expression of timing algorithm 3 in the single-leg mode when absolute times are used becomes as follows:

```

IF (frame with CFN = n does not arrive) THEN  $ToA_n = ref_n$ ;
IF  $ToA_n > LAToA_n - M_n$  THEN
{
 $M_{n+1} =$ 
15  $= MAX\left(\frac{1}{1-\alpha} \times (M_{fix} + \alpha \times (ToA_n - \delta_{\min} - ref_n)), M_{fix} + \alpha \times MLRWS\right)$ ;
 $LAToA_{n+1} = MAX(ToA_n + TTI + M_{n+1} - \delta_{\min}, ref_{n+1} + MLRWS)$ ;
}
ELSE
{
20  $LAToA_{n+1} = MAX(LAToA_n + TTI - \delta_{\min}, ref_{n+1} + MLRWS)$ ;
 $M_{n+1} = M_{fix} + \alpha(LAToA_{n+1} - ref_{n+1})$ ;
};

```

The compact expression of timing algorithm 3 in the single-leg mode when relative times are used becomes as follows:

```

25 IF (frame with CFN = n does not arrive) THEN  $RToA_n = 0$ ;
IF  $RToA_n > LARToA_n - M_n$  THEN
{
 $M_{n+1} = MAX\left(\frac{1}{1-\alpha} \times (M_{fix} + \alpha \times (RToA_n - \delta_{\min})), M_{fix} + \alpha \times MLRWS\right)$ ;
 $LARToA_{n+1} = MAX(RToA_n + M_{n+1} - \delta_{\min}, MLRWS)$ ;
30 }

```

ELSE

{

$LARToA_{n+1} = \text{MAX}(LARToA_n - \delta_{\min}, \text{MLRWS});$

$M_{n+1} = M_{\text{fix}} + \alpha \times LARToA_{n+1};$

5 };

The differences between the all-leg mode and the single-leg mode that were described for timing algorithm 1 also apply for timing algorithm 3.

Timing Algorithm 4

10 Timing algorithm 4 is not really an algorithm in the normal sense of the word. It uses fixed (non-adaptive) leg receive windows.

The leg receive window size (LRWS) for each DCH macro diversity leg can be either preconfigured, derived from DCH characteristics or signalled from the RNC. If signalled from the RNC, the $LARToA_{\text{init}}$ parameter is used as the LRWS. The RNC can base the calculation of suitable
15 LRWS/ $LARToA_{\text{init}}$ values on e.g. information in the topology database or possibly other information sources.

Assuming j macro diversity legs for a DCH (except the one across the DHO node's own radio interface) that are indexed $1 - j$. The size of the receive window (RWS), as defined by the latest allowed time of combining,
20 is then equal to the greatest leg receive window, i.e.
$$\text{RWS} = \text{MAX}(\text{LRWS}_1, \dots, \text{LRWS}_j).$$

There is no significant difference between the single-leg mode and the all-leg mode for this timing algorithm, but the algorithm may still behave differently for the different modes, if the leg receive windows for the
25 different macro diversity legs are given different sizes. Furthermore, if the algorithm is used in the all-leg mode, a single fixed receive window is used for all macro diversity legs instead of a fixed leg receive window for each macro diversity leg.



Timing Algorithms for Non-Radio Active DHO Nodes

The uplink combining timing algorithms in this section are designed for non-radio active DHO nodes, e.g. non-radio active Node Bs or routers, but they may also be used in radio active DHO nodes.

5 With certain modifications timing algorithm 1, 2 and 3 (expressed with absolute times) can be adapted to non-radio active DHO nodes. The modifications that are needed are:

- the LAToA_{init} parameter value has to be set differently,
- the MLRWS parameter cannot be used,
- 10 • most of the M (both M_{init} and M_{n+1}) calculation methods cannot be used (in essence M_{dynamic} cannot be calculated and therefore M = M_{fix}), and
- the actions for case 4 have to be modified (to adapt to the lack of time reference and to ensure that the relevant parameters in the all-leg mode are not adapted).

15 These modified timing algorithms are given the same number but with an "-NRA" suffix to indicate that they are adapted to Non-Radio Active DHO nodes.

When timing algorithms 1-NRA, 2-NRA and 3-NRA are used in the single-leg mode there is no limit to how far the leg receive window end advancing mechanism can advance the end of the leg receive window. This is due to the absence of the MLRWS parameter. Thus, if no frame arrives for a significant time period (with a consequent continuous advancing of the LAToA parameter), then when a frame subsequently arrives, the Δ parameter may be very large. For timing algorithms 1-NRA and 2-NRA this will result in an undesirably large δ parameter. Therefore, 20 timing algorithms 1-NRA and 2-NRA should preferably be used in the all-leg mode.

Timing Algorithm 1-Non-Radio Active (NRA)

The timing algorithm is first described in the single-leg mode and then in the all-leg mode. The differences between the two modes are highlighted.

There is no natural time reference marking the beginning of the leg receive window in a non-radio active DHO node. Therefore it is not possible to express the timing algorithm using relative times. Another consequence is that the MLRWS parameter cannot be used.

Yet a consequence of the lack of time reference is that no $LAToA_{init}$ parameter value can be set in advance, neither by the RNC nor by the non-radio active DHO node. Instead $LAToA_{init}$ is set in relation to the arrival time of the first uplink frame that is received on the transport bearer of the concerned macro diversity leg of the concerned DCH after initiation of the DHO functionality. When the first uplink frame from any of the macro diversity legs arrive, the $LAToA_{init}$ parameters of the other macro diversity legs are still undefined, which means that the latest allowed time of combining at that moment is defined by the only yet defined $LAToA_{init}$ parameter. To allow some time for the frames (with the same CFN) of the other macro diversity legs to arrive and be combined the $LAToA_{init}$ parameter is set to the arrival time of the first received uplink frame from the concerned macro diversity leg with an added margin, d . That is, assuming that the first received uplink frame from a macro diversity leg has a $CFN = i$ then $LAToA_{init} = LAToA_i = ToA_i + d$, where $0 \leq d \leq M_{fix}$. If this received frame was the first frame to be received from any of the macro diversity legs, the latest allowed time of combining is set to $LAToA_{init}$. If subsequently a frame arrives from any of the other macro diversity legs before the latest allowed time of combining and the $LAToA_{init}$ parameter for this macro diversity leg is set to a later time than the latest allowed time of combining, then the latest allowed time of combining is adjusted to this later time. The d parameter may be preconfigured, derived from DCH characteristics or signalled from the RNC. When the timing algorithm is used in the single-leg mode and the d parameter is signalled from the RNC, the d parameter may be different for different macro diversity legs. Since only the initial set of frames is affected by the d parameter(s), the d parameter is not important and may be omitted for simplicity (which is equivalent to setting $d = 0$).

Furthermore, since the calculation of $M_{dynamic}$ depends on time measurements in relation to a time reference (ref), the M parameter more or less has to be a fixed value, i.e. $M = M_{fix}$, which is the same for all CFNs for the same DCH macro diversity leg in a non-radio active DHO node.

However, M_{fix} may be calculated for a specific DCH macro diversity leg in a certain non-radio active DHO node, which means that it may vary from one DCH macro diversity leg to another, from one DCH to another and from one non-radio active DHO node to another. If M_{fix} is signalled from the RNC, it may be derived from information in the topology database (and/or possibly other information sources) in combination with DCH characteristics such as the QoS. Otherwise the non-radio active DHO node may calculate M_{fix} based on the DCH characteristics signalled from the RNC. M_{fix} may also be a preconfigured value. In any case it is recommended that $M_{fix} \gg \delta_{min}$.

The actions of case 4 also have to be changed, since there is no time reference value to set the ToA parameter to. Instead a non-radio active DHO node sets the ToA parameter to $LAToA - M$ in case 4.

The following is a description of the resulting timing algorithm 1-NRA (with $M = M_{fix}$ for all CFNs).

For the first received frame (i.e. the initial frame with CFN = i):

$$LAToA_i = ToA_i + d$$

$$\delta_{i+1} = \delta_{min}$$

$$LAToA_{i+1} = ToA_i + TTI + M_{fix} - \delta_{i+1}$$

For subsequent frames the same four cases are used as for timing algorithm 1:

$$\text{Case 1: } ToA_n \leq LAToA_n - M_{fix}$$

$$\text{Case 2: } LAToA_n - M_{fix} < ToA_n \leq LAToA_n$$

$$\text{Case 3: } ToA_n > LAToA_n$$

Case 4: The frame does not arrive at all, i.e. ToA_n is undefined.

The calculations performed for the different cases are described below.

Case 1, $ToA_n \leq LAToA_n - M_{fix}$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$$

$$5 \quad LAToA_{n+1} = LAToA_n + TTI - \delta_{n+1}$$

Case 2, $LAToA_n - M_{fix} < ToA_n \leq LAToA_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$$

$$LAToA_{n+1} = ToA_n + TTI + M_{fix} - \delta_{n+1}$$

Case 3, $ToA_n > LAToA_n$:

$$10 \quad \delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times \Delta_n$$

$$LAToA_{n+1} = ToA_n + TTI + M_{fix} - \delta_{n+1}$$

Case 4, the frame does not arrive at all:

In this case ToA_n is undefined. Assume that $ToA_n = LAToA_n - M_{fix}$ and perform the calculations of case 1.

15 The following is a compact way of expressing timing algorithm 1-NRA in the single-leg mode (for all but the first frame):

IF (frame with CFN = n does not arrive) THEN $ToA_n = LAToA_n - M_{fix}$;

$$\Delta_n = ToA_n - LAToA_n;$$

IF $\Delta_n > 0$ THEN $\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times \Delta_n$ ELSE $\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$;

20 IF $\Delta_n > -M_n$ THEN $LAToA_{n+1} = ToA_n + TTI + M_{fix} - \delta_{n+1}$

ELSE $LAToA_{n+1} = LAToA_n + TTI - \delta_{n+1}$;

When timing algorithm 1-NRA is used in the all-leg the ToA parameter is replaced by the ToAoLF (Time of Arrival of Last Frame) parameter, which refers to the arrival time of the last uplink frame with a certain CFN from any of the macro diversity legs to be combined. The LAToA_{init} parameter is set in the same manner as the latest allowed time of combining for the first set of frames is set for timing algorithm 1-NRA in the single-leg mode. That is, when the first frame arrives from any of the macro diversity legs (and assuming this frame has CFN = i), then LAToA_{init} = LAToA_i = ToA_i + d, which also consequently becomes the end of the initial receive window. If subsequently a frame with CFN = i arrives from any of the other macro diversity legs before the end of the receive window, the LAToA_{init}/LAToA_i parameter (and consequently the end of the initial receive window) is adjusted accordingly.

Furthermore, in the all-leg mode the condition for case 4 becomes that none of the uplink frames arrive (including all macro diversity legs to be combined). None of the relevant parameters are adapted in case 4.

If signalling of the M_{fix} parameter from the RNC is used, the RNC may or may not send an M_{fix} parameter to a non-radio active DHO node using the timing algorithm in the all-leg mode, when adding a new leg to be combined in the non-radio active DHO node. The RNC may also send a new M_{fix} parameter to a non-radio active DHO node whose combining procedure is not directly affected, because the delay of one of the existing macro diversity legs is affected by changes further down in the DHO node tree.

A description of timing algorithm 1-NRA in the all-leg mode follows below (with $\Delta_n = \text{ToAoLF}_n - \text{LAToA}_n$).

For the first received set of frames (i.e. the initial set of frames with CFN = i):

LAToA_i is set as described above.

$\delta_{i+1} = \delta_{\min}$

$\text{LAToA}_{i+1} = \text{ToAoLF}_i + \text{TTI} + M_{\text{fix}} - \delta_{i+1}$

For subsequent sets of frames the following four cases are considered for timing algorithm 1-NRA in the all-leg mode:

Case 1: $\text{ToAoLF}_n \leq \text{LToA}_n - M_{\text{fix}}$

Case 2: $\text{LToA}_n - M_{\text{fix}} < \text{ToAoLF}_n \leq \text{LToA}_n$

5 Case 3: $\text{ToAoLF}_n > \text{LToA}_n$

Case 4: No frame arrives from any of the macro diversity legs, i.e. ToAoLF_n is undefined.

The calculations performed for the different cases are described below.

Case 1, $\text{ToAoLF}_n \leq \text{LToA}_n - M_{\text{fix}}$:

10 $\delta_{n+1} = \delta_n/2 + \delta_{\text{min}1/2}$

$$\text{LToA}_{n+1} = \text{LToA}_n + \text{TTI} - \delta_{n+1}$$

Case 2, $\text{LToA}_n - M_{\text{fix}} < \text{ToAoLF}_n \leq \text{LToA}_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{\text{min}1/2}$$

$$\text{LToA}_{n+1} = \text{ToAoLF}_n + \text{TTI} + M_{\text{fix}} - \delta_{n+1}$$

15 Case 3, $\text{ToAoLF}_n > \text{LToA}_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{\text{min}1/2} + f \times \Delta_n$$

$$\text{LToA}_{n+1} = \text{ToAoLF}_n + \text{TTI} + M_{\text{fix}} - \delta_{n+1}$$


Case 4, no frame arrives from any of the macro diversity legs:

In this case the relevant parameters should not be adapted in any way, i.e.

20

$$\delta_{n+1} = \delta_n$$

$$\text{LToA}_{n+1} = \text{LToA}_n + \text{TTI}$$



The following is a compact way of expressing timing algorithm 1-NRA in the all-leg mode (for all but the first set of frames):

```

IF (no frame with CFN = n arrives) THEN
{
5    $\delta_{n+1} = \delta_n$ ;
    $ToAoLF_n = LAToA_n - M_{fix}$ ;
}
ELSE
{
10   $\Delta_n = ToAoLF_n - LAToA_n$ ;
   IF  $\Delta_n > 0$  THEN  $\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times \Delta_n$  ELSE  $\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$ ;
   IF  $\Delta_n > -M_n$  THEN  $LAToA_{n+1} = ToAoLF_n + TTI + M_{fix} - \delta_{n+1}$ 
   ELSE  $LAToA_{n+1} = LAToA_n + TTI - \delta_{n+1}$ ;
};

```

15 Timing Algorithm 2-NRA

When modifying timing algorithm 2 to timing algorithm 2-NRA the same modification principles can be used as when modifying timing algorithm 1 into timing algorithm 1-NRA (including the setting of $LAToA_{init}$ and that $M = M_{fix}$ for all CFNs). The resulting timing algorithm is first described in

20 the single-leg mode and then in the all-leg mode.

For the first received frame (i.e. the initial frame with CFN = i):

$$LAToA_i = ToA_i + d$$

$$\delta_{i+1} = \delta_{min}$$

$$LAToA_{i+1} = ToA_i + TTI + M_{fix} - \delta_{i+1}$$

25 $ELETtoA_{i+1} = ToA_i + \varphi + TTI$

For subsequent frames the same four cases are used as for timing algorithm 2:

Case 1: $ToA_n \leq LAToA_n - M_{fix}$

Case 2: $LAToA_n - M_{fix} < ToA_n \leq LAToA_n$ OR $LAToA_n < ToA_n \leq ELETtoA_n$

Case 3: $ToA_n > LAToA_n$ AND $ToA_n > ELETtoA_n$

Case 4: The frame does not arrive at all, i.e. ToA_n is undefined.

The calculations performed for the different cases are described below.

Case 1, $ToA_n \leq LAToA_n - M_{fix}$:

$$5 \quad \delta_{n+1} = \delta_n/2 + \delta_{min1/2}$$

$$LAToA_{n+1} = LAToA_n + TTI - \delta_{n+1}$$

$$ELETtoA_{n+1} = \text{MAX}(ELETtoA_n - \varepsilon, ToA_n + \varphi) + TTI$$

Case 2, $LAToA_n - M_{fix} < ToA_n \leq LAToA_n$ OR $LAToA_n < ToA_n \leq ELETtoA_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$$

$$10 \quad LAToA_{n+1} = ToA_n + TTI + M_{fix} - \delta_{n+1}$$

$$ELETtoA_{n+1} = \text{MAX}(ELETtoA_n - \varepsilon, ToA_n + \varphi) + TTI$$

Case 3, $ToA_n > LAToA_n$ AND $ToA_n > ELETtoA_n$:

$$\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times (ToA_n - \text{MAX}(LAToA_n, ELETtoA_n))$$

$$LAToA_{n+1} = ToA_n + TTI + M_{fix} - \delta_{n+1}$$

$$15 \quad ELETtoA_{n+1} = ToA_n + \varphi + TTI$$

Case 4, the frame does not arrive at all:

In this case ToA_n is undefined. Assume that $ToA_n = LAToA_n - M_{fix}$ and perform the calculations of case 1.

20 The following is a compact way of expressing timing algorithm 2-NRA in the single-leg mode (for all but the first frame):

IF (frame with CFN = n does not arrive) THEN $ToA_n = LAToA_n - M_{fix}$;

IF $ToA_n > LAToA_n$ AND $ToA_n > ELETtoA_n$ THEN

$$\delta_{n+1} = \delta_n/2 + \delta_{min1/2} + f \times (ToA_n - \text{MAX}(LAToA_n, ELETtoA_n))$$

ELSE $\delta_{n+1} = \delta_n/2 + \delta_{min1/2}$;

$$\text{ELEToA}_{n+1} = \text{MAX}(\text{ELEToA}_n - \varepsilon, \text{ToA}_n + \varphi) + \text{TTI};$$

$$\text{IF } \text{ToA}_n > \text{LATO}_n - M_n \text{ THEN } \text{LATO}_{n+1} = \text{ToA}_n + \text{TTI} + M_{\text{fix}} - \delta_{n+1}$$

$$\text{ELSE } \text{LATO}_{n+1} = \text{LATO}_n + \text{TTI} - \delta_{n+1};$$

5 When timing algorithm 2-NRA is used in the all-leg the ToA parameter is replaced by the ToAoLF (Time of Arrival of Last Frame) parameter, which refers to the arrival time of the last uplink frame with a certain CFN from any of the macro diversity legs to be combined. The LATOA_{init} parameter is set as described for timing algorithm 1-NRA in the all-leg mode. Furthermore, in the all-leg mode the condition for case 4 becomes that
10 none of the uplink frames arrive (including all macro diversity legs to be combined). None of the relevant parameters are adapted in case 4.

If signalling of the M_{fix} parameter from the RNC is used, the RNC may or may not send an M_{fix} parameter to a non-radio active DHO node using the timing algorithm in the all-leg mode, when adding a new leg to be
15 combined in the non-radio active DHO node. The RNC may also send a new M_{fix} parameter to a non-radio active DHO node whose combining procedure is not directly affected, because the delay of one of the existing macro diversity legs is affected by changes further down in the DHO node tree.

20 A description of timing algorithm 2-NRA in the all-leg mode follows below (with $\Delta_n = \text{ToAoLF}_n - \text{LATO}_n$).

For the first received set of frames (i.e. the initial set of frames with CFN = i):

LATO_i is set as described for timing algorithm 1-NRA in the all-leg mode.

25 $\delta_{i+1} = \delta_{\text{min}}$

$$\text{LATO}_{i+1} = \text{ToAoLF}_i + \text{TTI} + M_{\text{fix}} - \delta_{i+1}$$

$$\text{ELEToA}_{i+1} = \text{ToAoLF}_i + \varphi + \text{TTI}$$

For subsequent frames the same four cases are used as for timing algorithm 2:



Case 1: $ToAoLF_n \leq LAToA_n - M_{fix}$

Case 2: $LAToA_n - M_{fix} < ToAoLF_n \leq LAToA_n$ OR

$LAToA_n < ToAoLF_n \leq ELETtoA_n$

Case 3: $ToAoLF_n > LAToA_n$ AND $ToAoLF_n > ELETtoA_n$

- 5 Case 4: No frame arrives from any of the macro diversity legs, i.e.
 $ToAoLF_n$ is undefined.

The calculations performed for the different cases are described below.

Case 1, $ToAoLF_n \leq LAToA_n - M_{fix}$:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2}$$

10 $LAToA_{n+1} = LAToA_n + TTI - \delta_{n+1}$

$$ELETtoA_{n+1} = \text{MAX}(ELETtoA_n - \varepsilon, ToAoLF_n + \varphi) + TTI$$

Case 2, $LAToA_n - M_{fix} < ToAoLF_n \leq LAToA_n$ OR

$LAToA_n < ToAoLF_n \leq ELETtoA_n$:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2}$$

15 $LAToA_{n+1} = ToAoLF_n + TTI + M_{fix} - \delta_{n+1}$

$$ELETtoA_{n+1} = \text{MAX}(ELETtoA_n - \varepsilon, ToAoLF_n + \varphi) + TTI$$

Case 3, $ToAoLF_n > LAToA_n$ AND $ToAoLF_n > ELETtoA_n$:

$$\delta_{n+1} = \delta_n / 2 + \delta_{min1/2} + f \times (ToAoLF_n - \text{MAX}(LAToA_n, ELETtoA_n))$$

$$LAToA_{n+1} = ToAoLF_n + TTI + M_{fix} - \delta_{n+1}$$

20 $ELETtoA_{n+1} = ToAoLF_n + \varphi + TTI$

Case 4, no frame arrives from any of the macro diversity legs:

In this case the relevant parameters should not be adapted in any way,
i.e.

$$\delta_{n+1} = \delta_n$$

$$\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI}$$

$$\text{ELEToA}_{n+1} = \text{ELEToA}_n + \text{TTI}$$

5 The following is a compact way of expressing timing algorithm 2-NRA in the all-leg mode (for all but the first set of frames):

```

IF (no frame with CFN = n arrives) THEN
{
 $\delta_{n+1} = \delta_n;$ 
 $\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI};$ 
10  $\text{ELEToA}_{n+1} = \text{ELEToA}_n + \text{TTI};$ 
}
ELSE
{
IF  $\text{ToAoLF}_n > \text{LAToA}_n$  AND  $\text{ToAoLF}_n > \text{ELEToA}_n$  THEN
15  $\delta_{n+1} = \delta_n/2 + \delta_{\min}/2 + f \times (\text{ToAoLF}_n - \text{MAX}(\text{LAToA}_n, \text{ELEToA}_n))$ 
ELSE  $\delta_{n+1} = \delta_n/2 + \delta_{\min}/2;$ 
 $\text{ELEToA}_{n+1} = \text{MAX}(\text{ELEToA}_n - \varepsilon, \text{ToAoLF}_n + \varphi) + \text{TTI};$ 
IF  $\text{ToAoLF}_n > \text{LAToA}_n - M_n$  THEN
 $\text{LAToA}_{n+1} = \text{ToAoLF}_n + \text{TTI} + M_{\text{fix}} - \delta_{n+1}$ 
20 ELSE  $\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI} - \delta_{n+1};$ 
};

```

Timing Algorithm 3-NRA

25 When modifying the previously described timing algorithm 3 to timing algorithm 3-NRA the same modification principles can be used as when modifying the timing algorithms 1 and 2 into the timing algorithms 1-NRA and 2-NRA (including the setting of $\text{LAToA}_{\text{init}}$ and that $M = M_{\text{fix}}$ for all CFNs). The resulting timing algorithm is first described in the single-leg mode and then in the all-leg mode.

For the first received frame (i.e. the initial frame with CFN = i):

30 $\text{LAToA}_i = \text{ToA}_i + d$

$$\text{LAToA}_{i+1} = \text{ToA}_i + \text{TTI} + M_{\text{fix}} - \delta_{\text{min}}$$

Since timing algorithm 3-NRA is merely a simplification of timing algorithm 1-NRA (i.e. timing algorithm 1-NRA with $f = 0$), the rest of the algorithm is expressed only in compact form:

5 IF (frame with CFN = n does not arrive) THEN $\text{ToA}_n = \text{LAToA}_n - M_{\text{fix}}$;
 IF $\text{ToA}_n > \text{LAToA}_n - M_{\text{fix}}$ THEN $\text{LAToA}_{n+1} = \text{ToA}_n + \text{TTI} + M_{\text{fix}} - \delta_{\text{min}}$
 ELSE $\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI} - \delta_{\text{min}}$;

10 The differences between the all-leg mode and the single-leg mode that were described for timing algorithm 1-NRA apply for timing algorithm 3-NRA too. A compact description of timing algorithm 3-NRA in the all-leg mode follows below.

For the first received set of frames (i.e. the initial set of frames with CFN = i):

LAToA_i is set as described for timing algorithm 1-NRA in the all-leg mode.

15 $\text{LAToA}_{i+1} = \text{ToAoLF}_i + \text{TTI} + M_{\text{fix}} - \delta_{\text{min}}$

For subsequent sets of frames:

IF (no frame with CFN = n arrives) THEN
 $\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI}$
 ELSE IF $\text{ToAoLF}_n > \text{LAToA}_n - M_{\text{fix}}$ THEN
 20 $\text{LAToA}_{n+1} = \text{ToAoLF}_n + \text{TTI} + M_{\text{fix}} - \delta_{\text{min}}$
 ELSE $\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI} - \delta_{\text{min}}$;

Timing Algorithm 4-NRA

25 Timing algorithm 4-NRA is used only in the all-leg mode. A single-leg mode adaptation of the algorithm is conceivable, but it is not described in the present application.

In the following description of timing algorithm 4-NRA, the CFNs are numbered CFN0, CFN1, CFN2, ..., CFN n , CFN $n+1$, Parameters corresponding to the CFNs have the corresponding indexes.

In general, if all the candidate frames for CFN_n arrive before LAToA_n, the DHO node combines them and sends the result without waiting until LAToA_n. If not all candidate frames for CFN_n have arrived at LAToA_n, the
 5 DHO node combines the candidate frames that it has received and sends the result. If only one candidate frame is received, that frame will be forwarded unchanged. If no frame is received, nothing is sent.

When the first uplink frame that is subject for combination arrives at
 10 time t_0 , the DHO node sets the LAToA for the CFN, CFN₀, of the received frame to $t_0 + \Delta$ (this LAToA is denoted LAToA₀, i.e. LAToA₀ = $t_0 + \Delta$), where Δ is a fraction of the TTI.

The below stated general rules for subsequent CFNs are divided into two
 15 different cases:

1. All candidate frames for CFN_n arrive before LAToA_n.

In this case, if the time of arrival of the last combined frame for CFN_n, ToAoLCF_n, was later than, or equal to, LAToA_n - Δ , i.e. LAToA_n - $\Delta \leq$ ToAoLCF_n \leq LAToA_n, then LAToA_{n+1} is set to
 20 LAToA_{n+1} = ToAoLCF_n + TTI + Δ . Otherwise, if the last combined frame arrived before LAToA_n - Δ , i.e. ToAoLCF_n < LAToA_n - Δ , LAToA_{n+1} is set to LAToA_{n+1} = LAToA_n + TTI - δ , where δ is a fraction of Δ . According to another embodiment, an additional rule to this general rule is that if LAToA_n - $\Delta - \delta <$ ToAoLCF_n \leq LAToA_n - Δ , then LAToA_{n+1} is set to LAToA_{n+1} =
 25 LAToA_n + TTI.

2. Not all candidate frames for CFN_n arrive before LAToA_n.

In the second case, when not all the candidate frames for CFN_n have arrived at LAToA_n, the DHO node will set LAToA_{n+1} based on the time of arrival of the last combined frame for CFN_n, ToAoLCF_n. If ToAoLCF_n was later than, or equal to, LAToA_n - Δ (i.e. LAToA_n - Δ
 30

$\leq \text{ToALCF}_n \leq \text{LAToA}_n$), then LAToA_{n+1} is set to $\text{LAToA}_{n+1} = \text{ToAoLCF}_n + \text{TTI} + \Delta$. Otherwise, if the last combined frame arrived before $\text{LAToA}_n - \Delta$ (i.e. $\text{ToAoLCF}_n < \text{LAToA}_n - \Delta$) or if no candidate frame at all was received, LAToA_{n+1} is set to $\text{LAToA}_{n+1} = \text{LAToA}_n + \text{TTI}$. If subsequently a candidate frame for CFN_n is received after LAToA_n at the time of ToALUF_n (i.e. time of arrival of late uncombined frame for CFN_n), LAToA_{n+1} will be set to $\text{LAToA}_{n+1} = \text{ToAoLUF}_n + \text{TTI} + \Delta$. As for the treatment of the actual late uncombined frame, the DHO node has two options: it could forward it unchanged or discard it. Preferably, the DHO node should discard it in order to not waste bandwidth and not to confuse a possible second combining DHO node further along the uplink.

The described combining timing scheme is illustrated in **figure 7** and **8**.
 An example of preferred values of Δ and δ are $\delta = 10 \mu\text{s}$ and $\Delta = 250 \mu\text{s}$.

Timing algorithm 4-NRA results in that the DHO node adapts the LAToA to the maximum delay that a frame can experience on the path between the Node B and the combining DHO node, whenever a frame arrives later than expected, the DHO node adjusts the next LAToA . This is what is desired assuming that no frames are subject to larger transport delays than the QoS of the bearer allows. To recover from abnormally delayed frames and to handle clock drifts (between nodes whose clocks are not synchronised with each other), there is also a slow adaptation in the other direction (i.e. adjusting the next LAToA earlier in time) when all the candidate frames arrive early. δ is used for this purpose.

One way to reduce the need for an adaptive timing algorithm is to ensure that the Node B always sends a frame even when there is no correctly received data to send even when the DCH FP silent mode and DTX are used. It would then use a TFI indicating TBs of zero length, or even more preferred, send a frame consisting of only the CFN. In the latter case, the resulting IP packet, with header compression applied, would consist of only five bytes. With this function in place a combining DHO node could

always wait for all the expected candidate frames to arrive before combining the frames instead of using an adaptive timing algorithm.

5 A disadvantage is that data, albeit small packets, is unnecessarily transmitted. This would occur even when the connection is not in a macro diversity mode, unless a signalling message is introduced to remotely turn this function on and off from the RNC. Even though the superfluous packets would very small, thanks to efficient header compression, this would still counteract the very main purpose of
10 distributing macro diversity functionality from the RNC to node(s) located closer to the Node B. Another disadvantage is that if the rare event of a lost frame in the transport network occurs, the combining DHO node will keep waiting for the lost frame and consequently all the frames with that CFN will be wasted.

15

The method and thus functionality of the RNC, the Node Bs and the routers used in the present invention may be implemented by a computer program product. The computer program product is directly loadable into the internal memory of a computer within one or more nodes, in the
20 mobile telecommunication network according to the present invention, comprising the software code portions for performing the steps of the method according to the present invention. The computer program product is further stored on a computer usable medium, comprising a readable program for causing a computer, within a router, server, RNC or
25 Node B in the mobile telecommunication network according to the present invention, to control an execution of the steps of the method of the present invention.

30

In the drawings and specification, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

CLAIMS


1. A Diversity Handover, DHO, node executing a macro diversity
5 functionality in a mobile telecommunication system, **characterised in**
that the macro diversity functionality is distributed to the RNC and to
other nodes denoted DHO nodes, wherein the DHO node comprises
means for performing the uplink combining, means for estimating a
Latest Accepted Time of Arrival ,LAToA, for a next DCH frame or a
10 next set of DCH frames to be combined having a Connection Frame
Number_n, CFN_n, based on the time of arrival of the previous frame or
the previous set of frames having a CFN_{n-1}, and means for adjusting
the estimates of the LAToA for each new frame adapted to the
maximum transport delay that a frame can experience under normal
15 circumstances on its path from an originating Node B to the DHO
node.

69
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185

Abstract

The present invention relates to a Diversity Handover, DHO, node executing a macro diversity functionality in a mobile telecommunication system, characterised in that the macro diversity functionality is distributed to the RNC and to other nodes denoted DHO nodes. The DHO node comprises means for performing the uplink combining, means for estimating a Latest Accepted Time of Arrival, LAToA, for a next DCH frame or a next set of DCH frames to be combined having a Connection Frame Number_n, CFN_n, based on the time of arrival of the previous frame or the previous set of frames having a CFN_{n-1}, and means for adjusting the estimates of the LAToA for each new frame adapted to the maximum transport delay that a frame can experience under normal circumstances on its path from an originating Node B to the DHO node.

15





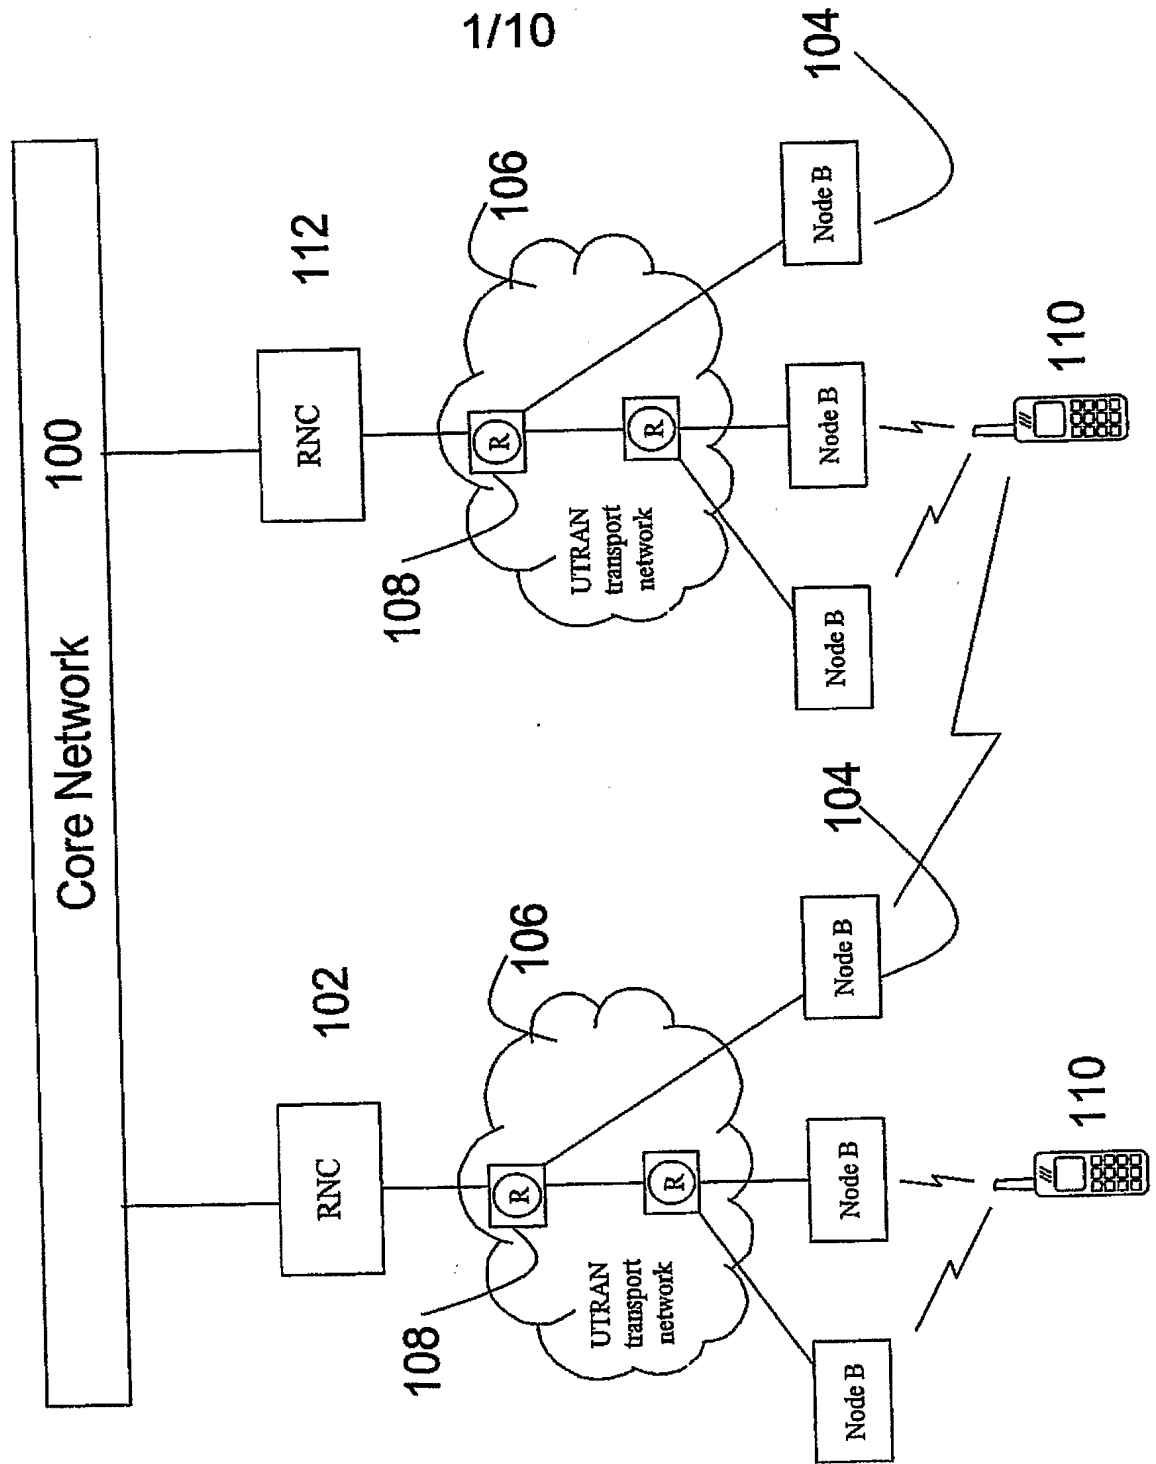


Fig. 1



CFN m:

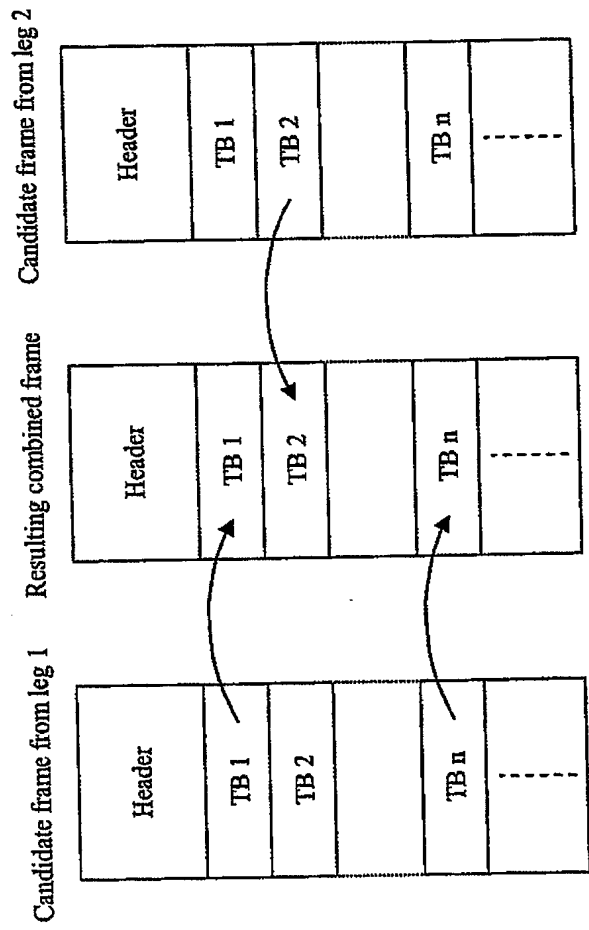

CFN m+1:

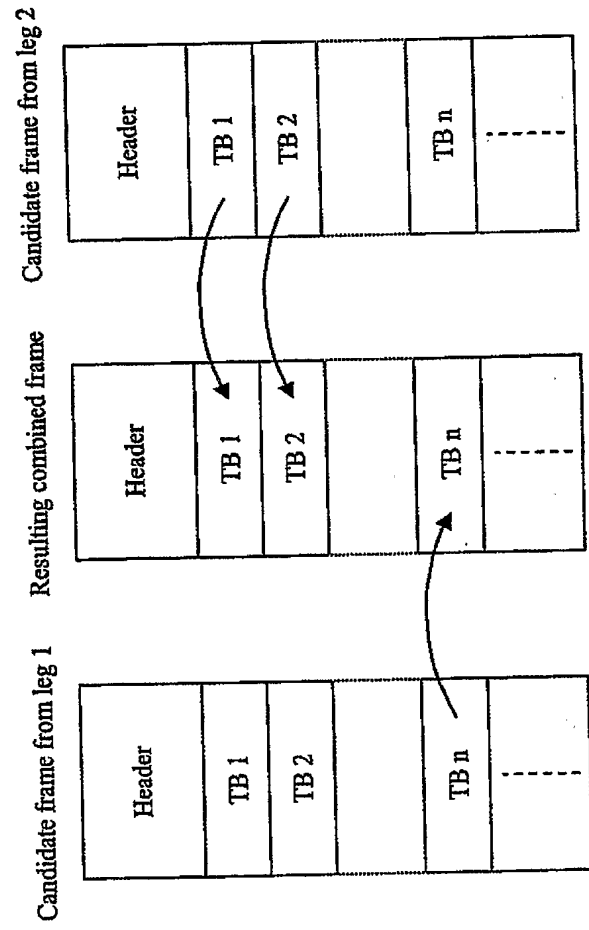

3/10

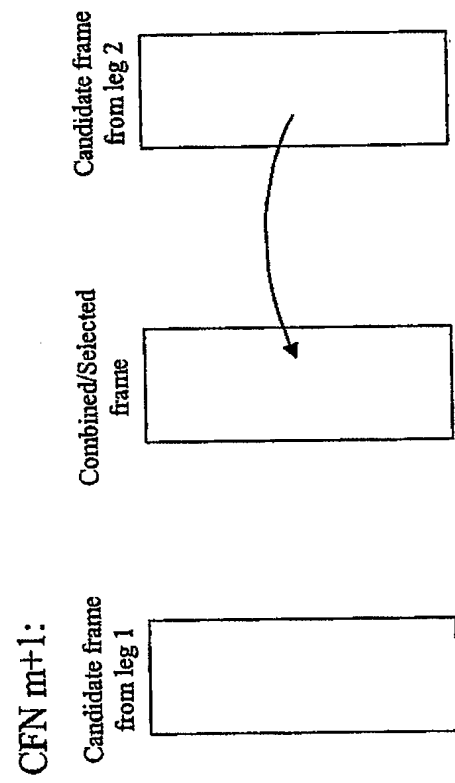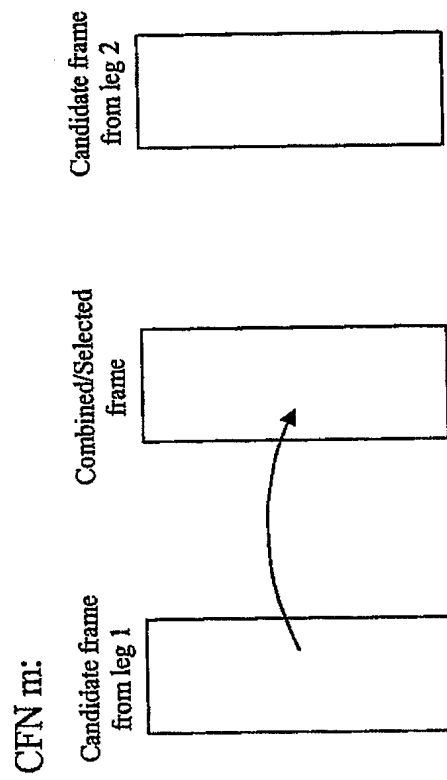

Macro diversity in the Node Bs



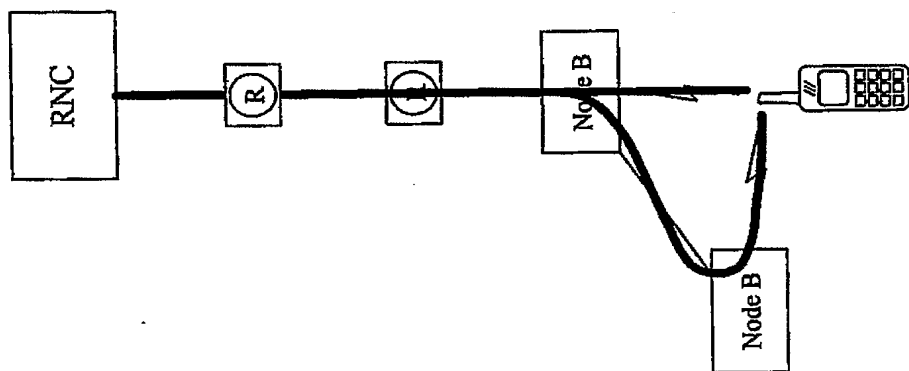


Fig. 4b

Macro diversity in the routers

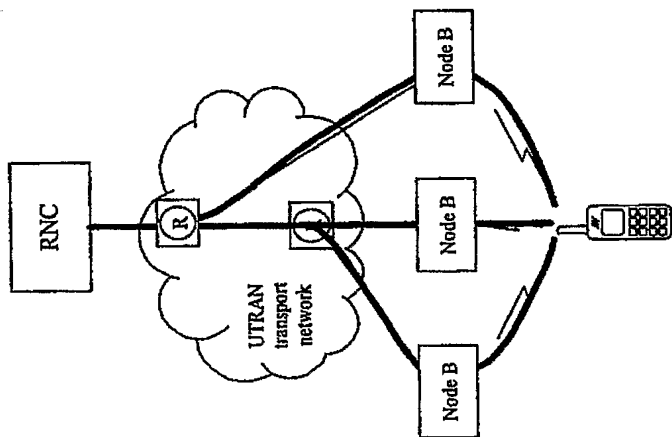


Macro diversity in the RNC

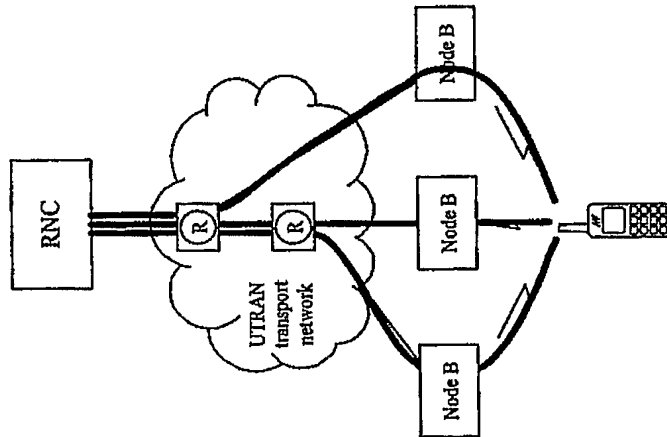

Macro diversity leg
Transport network router

Fig. 4a

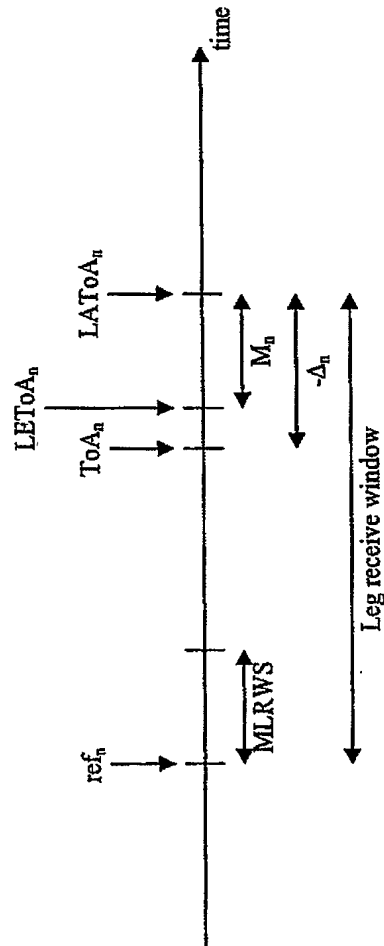

Legend:

ref_n The time reference (e.g. the expected time of arrival of uplink data across the radio interface) for CFN = n.

ToA_n Time of Arrival of the frame with CFN = n.

$LAToA_n$ Latest Acceptable Time of Arrival for the frame with CFN = n. This is the end of the receive window.


$LEToA_n$ Latest Expected Time of Arrival for the frame with CFN = n.

M_n $LEToA_n = LAToA_n - M_n$

Safety margin for the uplink frame with CFN = n. $M_n = M_{fix} + M_{dynamic-n}$


Δ_n The difference between the actual time of arrival and the latest

Fig. 5

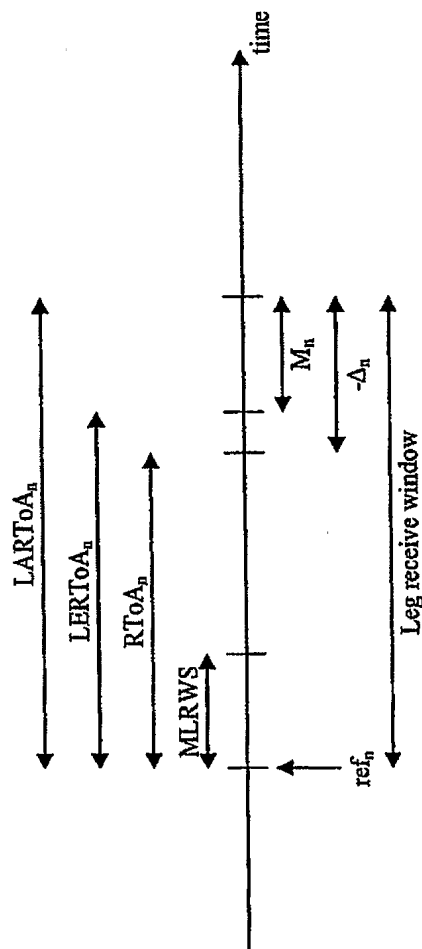**Legend:**

- ref_n The time reference (e.g. the expected time of arrival of uplink data across the radio interface) for CFN = n.
- $RToA_n$ Relative Time of Arrival of the frame with CFN = n.
- $LARToA_n$ Latest Acceptable Relative Time of Arrival for the frame with CFN = n. This is the end of the receive window.
- $LERToA_n$ Latest Expected Relative Time of Arrival for the frame with CFN = n. $LERToA_n = LARToA_n - M_n$
- M_n Safety margin for the uplink frame with CFN = n. $M_n = M_{fix} + M_{dyn}$
- Δ_n The difference between the actual time of arrival and the latest

CFN₀:

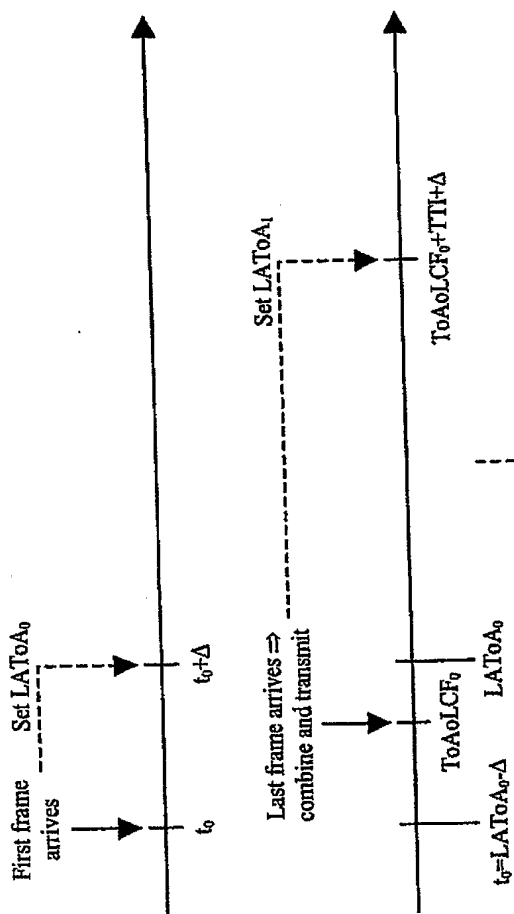

CFN_k:


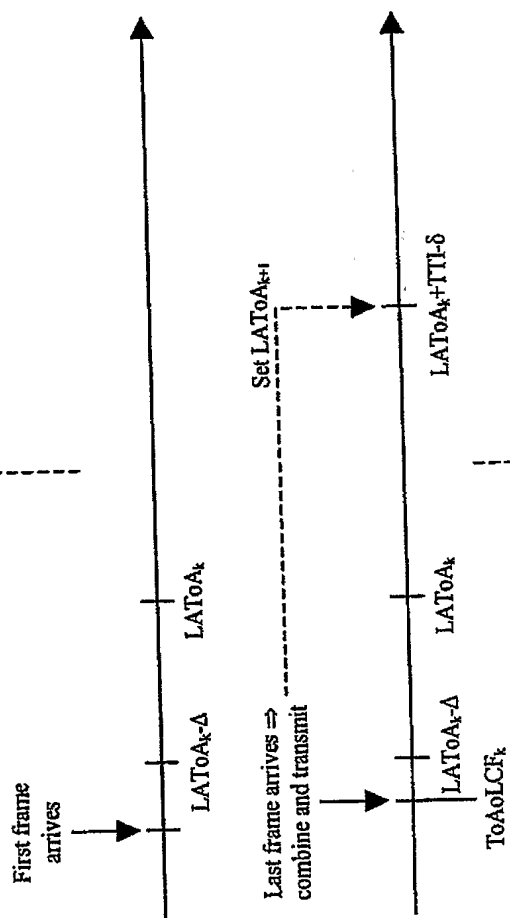



Fig. 7

8/10

CFN_m:

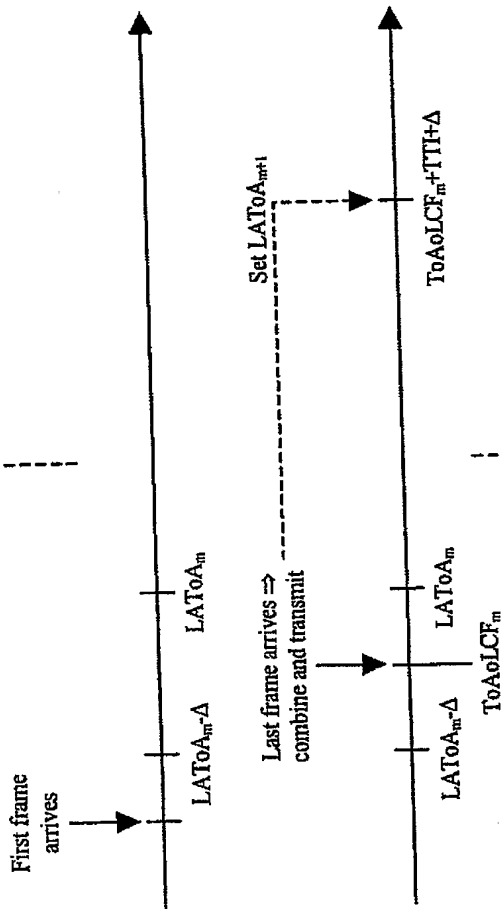

CFN_n:

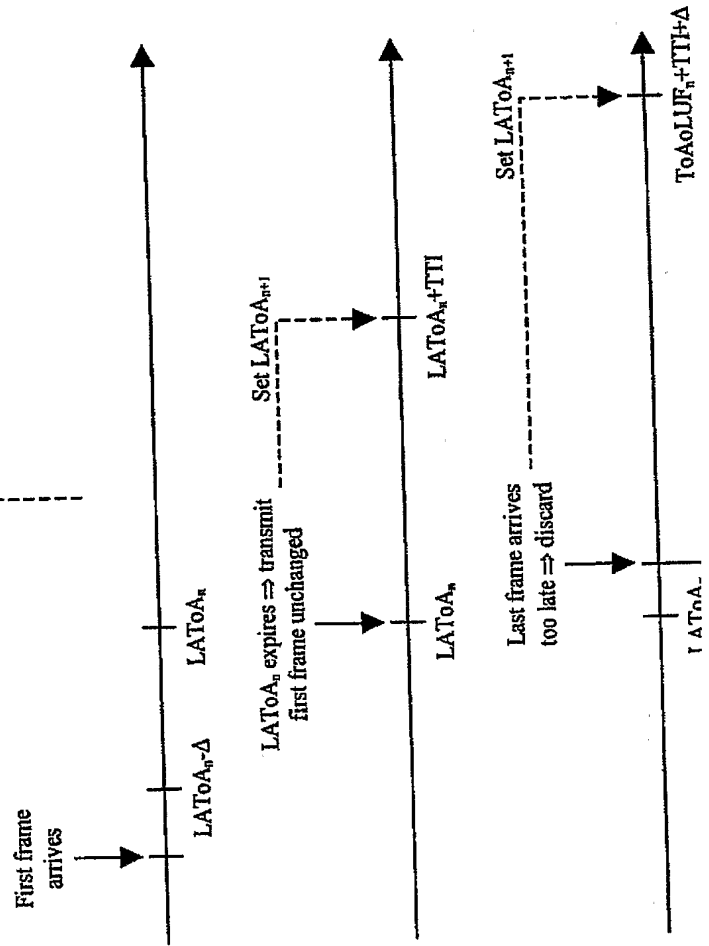

3503 102

9/10

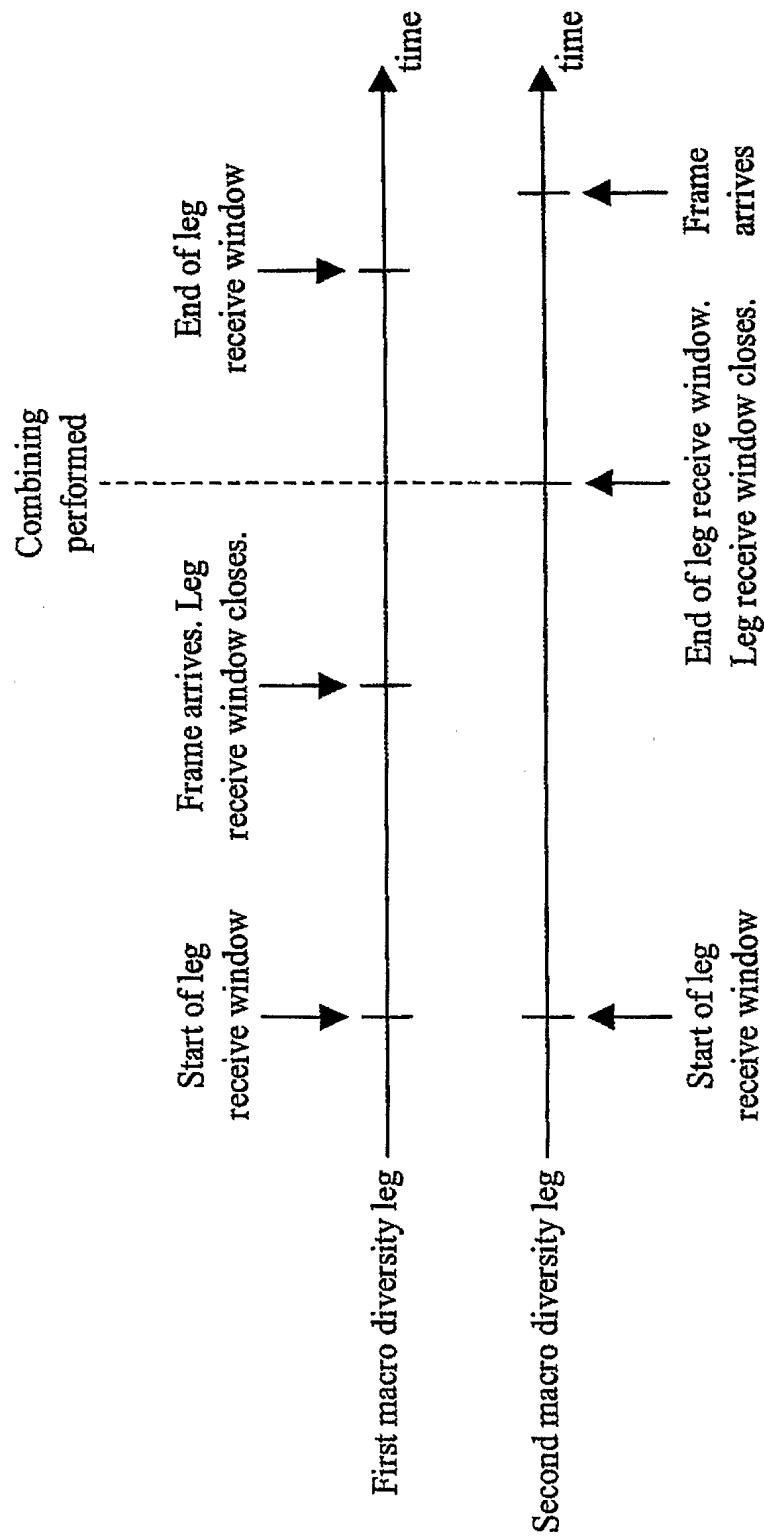


Fig. 9

